LIGHTING

广州创造光电科技有限公司

Guangzhou Create Optoelectronics Technology Co., Ltd.





WhatsApp

WeChat

LIGHTING 广州创造光电科技有限公司

Guangzhou Create Optoelectronics Technology Co., Ltd.

网 站: www.czlightings.com/en/

电 话: 020-86632558

手 机/微信: 15889734011

地 址: 广东省广州市花都区花山镇平西村十四队大街3号

Website: www.czlightings.com/en/

Tel: 020-86632558Mobile/

WeChat: 15889734011Address:

No. 3, 14th Team Street, Pingxi Village, Huashan Town, Huadu District,

Guangzhou City, Guangdong Province



LIGHTING



公司简介 COMPANY PROFILE

广州创造光电科技有限公司是一家以灯为主体的高科技企业。是集科研、生产、营销、行政、文化为一体的现代化综合式花园工厂。其主要生产电脑摇头灯、染色灯、LED图案灯、户外防水灯等系列，是目前国内规模较大，实力较强的舞台灯光、户外灯光、LED灯生产基地之一。　　在设备在服务领域多样化，于政府项目、体育场馆、剧场、剧院、多功能厅、户外公共广播、酒店工程、娱乐会所等多方向，全方位发展。在创建和发展民族自主品牌的同时，也将触角延伸到当前国家大力推进的文化创意业，广泛参与各种形式的活动及组织，策划，在创新的路上永不止步。

Guangzhou Create Photoelectric Technology Co., Ltd. is a high-tech enterprise with lamps as its main body. It is a modern comprehensive garden factory integrating scientific research, production, marketing, administration and culture. It mainly produces computer moving head lights, dyeing lights, LED pattern lights, outdoor waterproof lights and other series. It is currently one of the largest and most powerful production bases for stage lighting, outdoor lighting and LED lights in China.

The equipment is diversified in the service field, and it develops in all directions in government projects, stadiums, theaters, theaters, multi-purpose halls, outdoor public broadcasting, hotel engineering, entertainment clubs, etc. While creating and developing national independent brands, it also extends its tentacles to the cultural and creative industries that are currently vigorously promoted by the country, and extensively participates in various forms of activities, organizations, and planning, and will never stop on the road of innovation.

LIGHTING

380WBSW电脑图案光束灯 CZ-380A

380WBSW computer patterned beam lamp




技术参数：

光源: 原装欧司朗371灯泡
灯泡预期使用寿命: 2000 小时
色温：8000K
电压：AC100-240V,50/60HZ
控制模式: DMX512，RDM，自走，主从，声控
控制通道: 18CH/22CH
X轴/Y轴：，X轴540°，Y轴270°，光电复位系统，可自动检索复位
点泡系统：远程灯泡控制系统设计
可承受的最高环境温度: 45° C
可承受的最高表面温度: 65° C
可承受的最低工作温度: -5° C
线性调焦系统，16 bit精度调节
变焦范围：3°~50°
缩放角度：3°~7°（光束模式）7°~50°（图案模式）18°~30°（染色模式）
旋转图案盘: 1个旋转图案盘，7种图案+白圆，设有“插槽和锁定”系统
固定图案盘：1个固定图案盘，9种图案+6级光圈选择，
动感效果图案盘：4个固定图案+圆弧动感效果图案+白光圈
颜色盘：1个固定颜色盘，共11种颜色加白色，双向彩虹效果
双棱镜：配备可双向旋转及叠加的一个8棱镜一个24棱镜
频闪：机械式频闪设计，频闪频率高达1~14次/秒可任意调节，0~100%顺滑调光
防水等级：IP20
包装尺寸：52x50x63cm
重量：22kg

Parameter:

Light source: original OSRAM 371
Expected life of bulb: 2000 hours
Color temperature: 8000k
Voltage: AC100-240 - v, 50/60 hz
Control mode: DMX512, RDM, self-propelled, master-slave, voice control
Control channel: 18CH/22CH
X axis /Y axis:, X axis 540° , Y axis 270° , photoelectric reset system, automatic retrieval reset
Bubble system: design of remote bulb control system
Maximum tolerable ambient temperature: 45° C
Maximum tolerable surface temperature: 65° C
Minimum acceptable operating temperature: -5° C
Linear focus system, 16 bit precision adjustment
Zoom range: 3° ~50°
Scaling Angle: 3° ~7° (beam mode) 7° ~50° (pattern mode) 18° ~30° (dye mode)
Rotating pattern disc: 1 rotating pattern disc, 7 kinds of patterns + white circles, with "slot and lock" system
Fixed pattern plate: 1 fixed pattern plate, 9 patterns +6 levels of aperture selection
Dynamic effect pattern plate: 4 fixed patterns + arc dynamic effect pattern + white light circle
Color disc: 1 fixed color disc, a total of 11 colors plus white, two-way rainbow effect
Double prism: equipped with an 8 prism and a 24 prism that can rotate and stack bidirectional
Stroboscope: mechanical stroboscope design, stroboscope frequency up to 1 ~ 14 times/second can be adjusted arbitrarily, 0~100% smooth dimming
Waterproof rating: IP20
Packing size: 52x50x63cm
Weight: 22 kg

Size photo:

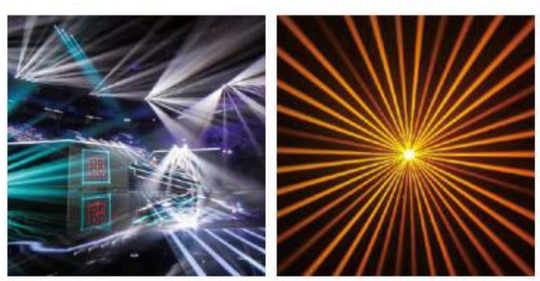





LIGHTING

CZ-350A 350WBSW电脑图案光束灯

350WBSW computer patterned beam lamp

技术参数：

电压：AC100-240V,50/60HZ
总功率：600W
光源: YODN MSD 350W 17R
灯泡预期使用寿命: ≥1500 小时
色温：7800K
控制模式: DMX512，自走，声控,主从机模式
控制通道: 16/24CH两种模式可切换
显示：2.8寸触摸液晶显示,可倒转180°显示
X轴/Y轴：16 bit 精度扫描，X轴540°，Y轴270°，
采用光电复位系统，可自动检索复位
点泡系统：远程灯泡控制系统设计
可承受的最高环境温度: 45° C
可承受的最高表面温度: 65° C
可承受的最低工作温度: -5° C
光束、图案、染色功能于一体
线性调焦系统，16 bit精度调节
变焦范围：2.5°~38°
旋转图案盘: 1个旋转图案盘，9种图案+白圆，设有“插槽和锁定”系统,可定制LOGO
固定图案盘：1个固定图案盘，13种图案+白圆
颜色盘：1个固定颜色盘，共13种颜色加白色，双向彩虹效果
双棱镜：配备可双向旋转及叠加的一个8棱镜一个6直棱镜
频闪：采用机械式频闪设计，频闪频率高达1~14次/秒可任意调节，0~100%顺滑调光
独立的雾化效果
防尘、防油污设计
防水等级：IP20
纸箱尺寸：48x48x59cm
重量：20kg

Parameter:


Voltage: AC100-240V, 50/60hz
Total power: 600W
Light source: yodn MSD 350W 17R
Expected service life of bulb: ≥ 1500 hours
Color temperature: 7800k
Control mode: DMX512, self-propelled, voice control, master slave modeControl channel: 16 / 24ch two modes can be switched
Display: 2.8 "touch LCD, and can be reversed by 180 ° display
X-axis / Y-axis: 16 bit precision scan, X-axis 540 ° , Y axis 270 ° ,
Photoelectric reset system can automatically retrieve and reset
Bubble system: Design of remote bulb control system
Maximum ambient temperature to be tolerated: 45 ° C
Maximum surface temperature to be borne: 65 ° C
Minimum operating temperature to be borne: - 5 ° C
Beam, pattern and dyeing function are integratedLinear focusing system, 16 bit precision adjustment
Zoom range: 2.5 ° ~ thirty-eight °
Rotating pattern disk: 1 rotary pattern disk, 9 patterns + white circle, with "slot and lock" system, which can be customized logo
Fixed pattern plate: 1 fixed pattern plate, 13 patterns + white circle
Color plate: 1 fixed color plate, 13 colors plus white, two-way rainbow effect
Biprism: equipped with an 8 prism and a 6-straight prism which can be rotated and superimposed in two directions
Strobe: mechanical strobe design is adopted, with stroboscopic frequency up to 1-14 times / s adjustable arbitrarily, and 0-100% smooth dimming
Independent atomization effect
Design of dust and oil pollution prevention
Waterproof grade: IP20
Carton size: 48x48x59cm
Weight: 20kg




Size photo:









380W电脑光束灯 CZ-380A

380W computer beam lamp




技术参数:

电源:AC100V-240V
频率:50Hz-60Hz
总功率:600W
保险丝:7A
镇流器：电子镇流器
光源: 原装欧司朗371灯泡
色温：7800K
平均寿命：1500H
电机数量：共14个静音电机，XY三相电机
调光：独立的双片式装置，0－14次/秒超高速频闪,0-100%线性调节.
固定颜色：14个色片+白光，可实现半色、全色、单双色渐变和正反方向慢快彩虹效果，具有霍尔、磁铁定位和任意角度自动纠错功能。
静态图案：一个（白光+10个图案+动感效果图案）金属图案盘，耐高温
棱镜：8+16+24蜂窝棱镜、8棱镜，双棱镜可叠加，可双向独立旋转,有自动对焦功能
色片：1个六色片（可做七彩效果）
雾化：1个独立的雾化效果，光斑柔和自然
控制通道：16CH/20CH通道
控制信号：国际标准 DMX512
外观：耐高温塑胶
灯体颜色：黑色
防护等级：IP20
纸箱尺寸：66x32x40cm
净重：16.5kg

Parameter:

Power supply: AC100V - 240v
Frequency: 50hz-60hz
Total power: 600w
Fuse: 7a
Ballast: Electronic ballast
Source: original OSRAM 371
Color temperature: 7800k
Average life: 1500H
Number of motors: 14 silent motors, XY three-phase motors
Dimming: independent dual device, 0-14 times/SEC ultra high speed stroboscopic,0-100% linear adjustment
Fixed color: 14 color sheets + white light, can achieve half color, panchromatic, single and double color gradient and positive and negative direction slow fast
Rainbow effect, with Hall, magnet positioning and any Angle of automatic error correction function
Static pattern: one (white light +10 patterns + dynamic effect pattern) metal pattern plate, high temperature resistance
Prism: 8+16+24 honeycomb prism, 8 prism, double prism can be superimposed, two-way independent rotation, with automatic focus function
Color plate: 1 six-color plate (can make seven color effect)
Atomization: 1 independent atomization effect, soft and natural light spots
Control channel: 16CH/20CH channel
Control signal: international standard DMX512
Appearance: high temperature resistant plastic
Color of lamp body: black
Protection grade: IP20
Carton size: 66x32x40cm
Net weight: 16.5 kg

Size photo:







CZ-B350 350W电脑光束灯

350W computer beam lamp

技术参数:

电源:AC100V-240V
频率:50Hz-60Hz
总功率:600W
保险丝:5A
镇流器：电子镇流器
光源:350W优灯灯泡
色温：7800K
平均寿命：2000H
电机数量：共13个静音电机，XY三相电机
调光：独立的双片式装置，0－14次/秒超高速频闪,0-100%线性调节
固定颜色：14个色片+白光，可实现半色、全色、单双色渐变和正反方向慢快彩虹效果
静态图案：一个（白光+10个图案+3个玻璃图案）金属图案盘，耐高温
棱镜：8+16+24蜂窝棱镜、8棱镜
色片：1个六色片（可做七彩效果）
雾化：1个独立的雾化效果，光斑柔和自然
控制通道：16CH通道
控制信号：国际标准 DMX512/RDM功能
外观：耐高温塑胶
灯体颜色：黑色
防护等级：IP20
纸箱尺寸：46x42x57cm
净重：17kg

Parameter:


Power supply: AC100V - 240v
Frequency: 50hz-60hz
Total power: 600w
Fuse: 5a
Ballast: Electronic ballast
Light source: YODN 350W
Color temperature: 7800k
Average life: 2000H
Number of motors: 13 silent motors, XY three-phase motors
Dimming: independent dual device, 0-14 times/SEC ultra high speed stroboscopic,0-100% linear adjustment
Fixed color: 14 color sheets + white light, can achieve half color, panchromatic, single and double color gradient and positive and negative direction of slow rainbow effect
Static pattern: one (white light +10 patterns +3 glass patterns) metal pattern plate, high temperature resistant
Prism: 8+16+24 honeycomb prism, 8 prism
Color plate: 1 six-color plate (can make seven color effect)
Atomization: 1 independent atomization effect, soft and natural light spots
Control channel: 16CH channel
Control signal: international standard DMX512/RDM function
Appearance: high temperature resistant plastic
Color of lamp body: black
Protection grade: IP20
Carton size: 46x42x57cm
Net weight: 17kg



Size photo:







380W电脑摇头光束灯

CZ-B380

380W computer shaking beam lamp




技术参数：

光源: 原装欧司朗371灯泡
灯泡预期使用寿命: 2000 小时
色温：8000K
电压：AC100-240V,50/60HZ
总功率：600W
控制面板: LCD彩色液晶面板+5个按键，中英文显示界面.
控制模式: DMX512，RDM，自走，主从，声控
控制通道: 24CH/28CH(带光圈)，16CH/20CH(不带光圈)
X轴/Y轴：X轴540°，Y轴270°，采用光电复位系统，可自动检索复位
点泡系统：远程灯泡控制系统设计
光杯效果：出光口带有一圈LEDRGB灯珠,可做跑马、渐变等效果，速度可调。
图案盘：一个金属图案盘，15个图案加3个玻璃图案加白光圈
颜色盘：14个色片+白光，可实现半色、全色、单双色渐变和正反方向慢快彩虹效果
双棱镜：配备可双向旋转及叠加的一个8棱镜一个8+8+8蜂窝棱镜
频闪：采用机械式频闪设计，频闪频率高达1～14次/秒可任意调节，
0~100%顺滑调光
色片：1个六色片（可做七彩效果）
可承受的最高环境温度: 45° C
可承受的最高表面温度: 65° C
可承受的最低工作温度: -5° C
防护等级：IP20　　净重：16.5kg
纸箱尺寸：66x32x40cm

Parameter:

Light source: original OSRAM 371
Expected life of bulb: 2000 hours
Color temperature: 8000k
Voltage: AC100-240v, 50/60hz
Total power: 600W
Control panel: LCD color LCD panel +5 buttons, Chinese and English display interface
Control mode: DMX512, RDM, self-propelled, master-slave, voice control
Control channel: 24CH/28CH(with aperture), 16CH/20CH(without aperture)
X-axis/Y-axis: X-axis 540° , Y-axis 270° , photoelectric reset system, automatic retrieval reset
Bubble system: design of remote bulb control system
Light effect: light mouth with a circle of LEDRGB lamp beads, can do horse racing, gradual change and other effects, speed adjustable
Pattern plate: a metal pattern plate with 15 patterns plus 3 glass patterns plus white light rings
Color disc: 14 color plates + white light, can achieve half color, full color, single and double color gradient and positive and negative direction of slow rainbow effect
Double prism: Equipped with an 8 prism which can rotate and stack bidirectional and an 8+8+8 honeycomb prism
Stroboscopic: mechanical stroboscopic design, stroboscopic frequency up to 1 ~ 14 times/second can be adjusted arbitrarily, 0~100% smooth dimming
Color plate: 1 six-color plate (can make seven color effect)
Maximum tolerable ambient temperature: 45° C
Maximum tolerable surface temperature: 65° C
Minimum acceptable operating temperature: -5° C
Protection grade: IP20　　Net weight: 16.5kg
Carton size: 66x32x40cm

Size photo:

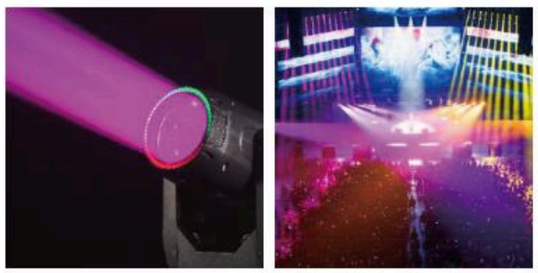



280W/260W电脑摇头光束灯

CZ-B280/B260

280W/260W computer shaking beam lamp

技术参数：

光源: 280W
灯泡预期使用寿命: 2000 小时
色温：7800K
电压：AC100-240V,50/60HZ
总功率：400W
光束角度0-2°
控制模式: DMX512，RDM，自走，主从，声控
控制通道: 16CH
X轴/Y轴：X轴540°，Y轴270°，采用光电复位系统，可自动检索复位
颜色盘：1个固定颜色盘，共13种颜色加白色，双向彩虹效果可实现半色、全色、单双色渐变和正反方向慢快
固定图案盘：1个固定图案盘，10种金属图案+3种玻璃图案
双棱镜：配备可双向旋转及叠加的一个8棱镜一个16+8棱镜
频闪：采用机械式频闪设计，频闪频率高达1～14次/秒可任意调节，
0~100%顺滑调光
独立的雾化效果
独立的七彩色片
点泡系统：远程灯泡控制系统设计
可承受的最高环境温度: 45° C
可承受的最高表面温度: 65° C
可承受的最低工作温度: -5° C
防水等级：IP20
净重：17kg
纸箱尺寸：66x32x40cm



Parameter:

Light source: 280w
Expected life of bulb: 2000 hours
Color temperature: 7800k
Voltage: AC100-240v, 50/60hz
Total power: 400W
The beam Angle is 0-2°
Control mode: DMX512, RDM, self-propelled, master-slave, voice control
Control channel: 16CHX-axis/Y-axis: X-axis 540° , Y-axis 270° , photoelectric reset system, automatic retrieval reset
Color disc: 1 fixed color disc, a total of 13 colors plus white, bi-directional rainbow effect can achieve half color
Panchromatic, single and double color gradient and positive and negative direction is slow and fast
Fixed pattern plate: 1 fixed pattern plate, 10 kinds of metal pattern +3 kinds of glass pattern
Double prism: Equipped with an 8 prism which can rotate and stack bidirectional and a 16+8 prism
Stroboscopic: mechanical stroboscopic design, stroboscopic frequency up to 1 ~ 14 times/second can be adjusted arbitrarily
0~100% smooth dimming
Independent atomizing effect
Separate seven colour sheets
Bubble system: design of remote bulb control system
Maximum tolerable ambient temperature: 45° C
Maximum tolerable surface temperature: 65° C
Minimum acceptable operating temperature: -5° C
Waterproof rating: IP20
Net weight: 17 kg
Carton size: 66x32x40cm

Size photo:





LIGHTING

电脑摇头光束灯 CZ-B290

The computer shook the light beam



技术参数：

电源:AC100V-240V/50Hz-60Hz
光源:PHILIPS 250W
总功率:450W
保险丝:5A
镇流器：电子镇流器
色温：7800K
平均寿命：2000H
调光：独立的双片式装置，0－14次/秒超高速频闪,0-100%线性调节.
固定颜色：14个色片+白光，可实现半色、全色、单双色渐变和正反方向慢快彩虹效果
静态图案：一个（白光+9个图案+4个玻璃图案）金属图案盘，可实现流水、抖动、随机动感和正反方向慢快转换效果
棱镜：8+8+8蜂窝棱镜、12棱镜，棱镜可叠加，可双向独立旋转
色片：1个六色片（可做七彩效果）
雾化：1个独立的雾化效果，光斑柔和自然
控制通道：16CH通道
控制信号：国际标准 DMX512/RDM功能
外观：耐高温塑胶
灯体颜色：黑色
防护等级：IP20
纸箱尺寸：40.5x37.5x53cm
净重：14kg

Parameter:

Power supply: AC100v - 240v 50hz-60hz
light source: PHILIPS 250W
Total power: 450w
Fuse: 5a
Ballast: Electronic ballast
Color temperature: 7800k
Average life: 2000H
Dimming: independent dual device, 0-14 times/SEC ultra high speed stroboscopic,0-100% linear adjustment
Fixed color: 14 color sheets + white light, can achieve half color, panchromatic, single and double color gradient and positive and negative direction of slow rainbow effect
Static pattern: one metal pattern plate (white light +9 patterns +4 glass patterns), which can realize the effect of flowing water, jitter, random movement and slow and fast conversion of positive and negative directions
Prism: 8+8+8 honeycomb prism, 12 prism, prism can be superimposed, can rotate independently in both directions
Color plate: 1 six-color plate (can make seven color effect)
Atomization: 1 independent atomization effect, soft and natural light spots
Control channel: 16CH channel
Control signal: international standard DMX512/RDM function
Appearance: high temperature resistant plastic
Color of lamp body: black
Protection grade: IP20
Carton size: 40.5x37.5x53cm
Net weight: 14 kg

Size photo:





LIGHTING

CZ-B230 230W光束图案灯

230W beam pattern lamp

技术参数：

光源：YODN 230W
电压：AC100V-240V. 50Hz-60Hz
总功率：400W
光学器件：3片透镜式镜头组，变焦0°--3.9；电子聚焦；
2种通道模式：16个国际标准DMX512通道和20个国际标准DMX512通道
水平扫描：540°（16bit精度扫描）
垂直扫描：270°（16bit精度扫描）
色片盘：14个色片+白光，带双向旋转的彩虹效果
旋转图案盘：17个图案片+白光，带图案抖动和图案任意定位功能
棱镜盘：8棱镜或16棱镜，可正反方向旋转，并具有棱镜定位功能
频闪：双铡刀频闪频率最高可以13次每秒，并可选择随机频闪及脉冲频闪
调光：0%~100%线性调光
雾化：0%~100%线性雾化
美观的液晶显示 ，采用穿梭轮选择菜单，方便快捷
电子整流器：使产品重量更轻，亮度更强，灯泡更稳定，更环保，更节能




Parameter:

Light source: yodn 230W
Voltage: AC100V-240V, 50 hz-60hz
Total power: 400W
Optical components: 3 lens lens group, zoom 0° -3.9; Electron focusing
2 channel modes: 16 international standard DMX512 channels and 20 international standard DMX512 channels
Horizontal scanning: 540° (16bit precision scanning)
Vertical scan: 270° (16bit precision scan)
Color tray: 14 color plates + white light, rainbow effect with bidirectional rotation
Rotating pattern plate: 17 pattern pieces + white light, with pattern shaking and pattern arbitrary positioning function
Prism disc: 8 prisms or 16 prisms, can rotate in positive and negative directions, and has the prism positioning function
Stroboscope: the frequency of stroboscope can be up to 13 times per second
Random and pulsed stroboscope can be selected
Dimming: 0%~100% linear dimming
Atomization: 0%~100% linear atomization
Beautiful liquid crystal display, using shuttle wheel selection menu, convenient and quick
Electronic rectifier: make the product lighter, brighter, more stable bulb, more environmental protection, more energy saving

Size photo:



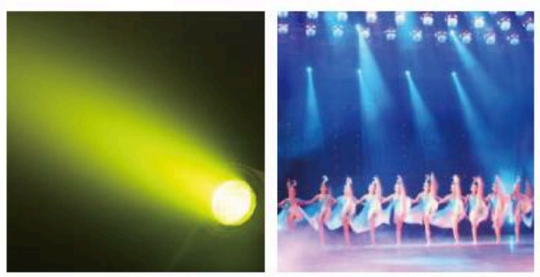

200W LED 三合一摇头灯 CZ-L200

200W LED 3in1 Moving Head Light



技术参数:

光源: 200W LED 白光模组
最大功率: 290W
电源: 宽电压输入开关电源100V-240V 50-60Hz
色温: 7500K
灯珠寿命: 50000 hours
光斑角度: 7-21°
控制方式: 18通道,DMX512信号输入/声控/自动运行
X/Y扫描: 水平540°，垂直: 270°
颜色: 9个色片+白光, 彩虹效果, 可任意定位
图案: 7个可插拔式图案片, 图案旋转, 图案流水效果
固定图案: 10个固定图案+白光, 带抖动, 正反流水效果
调光: 0-100％线性调光
频闪: 每秒0-25ZH/S,同步脉冲频闪,
随机脉冲频闪等
效果盘: 4棱镜, 带正反旋转效果
防水等级: IP20
产品尺寸: 343*232*537MM
包装尺寸: 57x45x44MM
净重: 15KG 毛重: 18KG

Parameter:

Light source: 200W LED white light module
Maximum power: 290W
Power supply: wide voltage input switching power supply
100V-240V 50-60Hz
Color temperature: 7500k
Bead life: 50000 hours
Spot Angle: 7-21°
Control mode: 18 channels, DMX512 signal input/voice control/automatic operation
X/Y scan: Horizontal 540° , Vertical 270°
Color: 9 colors + white light, rainbow effect, can be arbitrarily positioned
Pattern: 7 pluggable pattern pieces, pattern rotation, pattern flowing effect
Fixed pattern: 10 fixed patterns + white light, with shaking, positive and negative flowing water effect
Dimming: 0-100% linear dimming
Stroboscopic: 0-25zh /S per second, synchronous pulse stroboscopic
Random pulse stroboscope, etc
Effect disc: 4 prism, with positive and negative rotation effect
Waterproof rating: IP20
Product size: 343*232*537MM
Packing size: 57x45x44MM
Net weight: 15KG Gross weight: 18KG

Size photo:





CZ-L300 LED300W三合一摇头光束灯

LED300W 3in-1 head shaking beam lamp

技术参数:

LED 300W图案摇头灯
额定电压：AC100-240V 50-60Hz
额定功率：450W
光源：300W LED 进口高亮度白光模组
色温：7800K
显色指数：Ra≥90
灯珠寿命：大于50000 小时
光斑角度：4度-38度
DMX通道：20/25CH可切换
控制模式：DMX512,自走，声控,主从机模式
X/Y扫描：16 bit 精度扫描，水平：540°，垂直：270°
颜色盘：一个颜色盘7个色片+白光，一个七彩颜色盘，可做彩虹效果
图案：2个图案盘＋1个效果图案盘，
旋转图案盘7个可插拔式旋转玻璃图案带3D图案效果，固定图案盘7个图案加白光，
调光：0-100％线性调光，
频闪：同步脉冲频闪，随机脉冲频闪
棱镜盘：3棱镜，
显示：彩色液晶显示，中英文显示，可倒转显示，
高效热导管散热系统，无灯珠损坏风险
重量：20KG
尺寸：48*48*59CM

Parameter:


LED 300W pattern rotating lamp
Rated voltage: AC100-240V 50-60Hz
Rated power: 450W
Light source: 300W LED imported high-brightness white light module
Color temperature: 7800K
Color rendering index: Ra≥90
Lamp life: more than 50000 hours
Spot angle: 4 degrees -38 degrees
DMX channel: 20/25CH switchable
Control mode: DMX512, self-propelled, voice control, master-slave mode
X/Y scan: 16 bit precision scan, horizontal: 540° , vertical: 270°
Color wheel: a color wheel with 7 color chips + white light, a colorful color wheel, can do rainbow effect
Pattern: 2 pattern discs + 1 effect pattern disc, 7 rotating pattern discs, pluggable rotating glass patterns with 3D pattern effects, fixed pattern discs with 7 patterns plus white light,
Dimming: 0-100% linear dimming,
Stroboscopic: synchronous pulse stroboscopic, random pulse stroboscopic
Prism disk: 3 prisms,
Display: color LCD display, Chinese and English display, reversible display,
Efficient heat pipe cooling system, no risk of lamp bead damage
Weight: 20KG
Size: 48*48*59CM



Size photo:







LED80W摇头光束灯 CZ-L80

LED80W moving head beam lamp



技术参数：

光源：80LED 白光模组
最大功率：250W
电源：宽电压输入开关电源100V-240V 50-60Hz
色温：7000K-8000K
灯珠寿命：50000 hours
光斑角度：2°
控制方式：DMX512、主从运行
通道模式:16CH/20CH
支持RDM功能，DMX软件升级功能
选配网络功能支持：Artnet,sACN,网络协议
X/Y扫描：水平540°，垂直：270°
颜色：13个色片+纯白光，彩虹效果，可任意定位
固定图案：12个固定图案，抖动流水效果
6彩：一个独立6彩盘，可实现图案彩虹效果
雾化镜：雾化柔光镜
调光：0-100%线性调光
频闪：同步脉冲频闪，随机脉冲频闪
棱镜盘1：8棱镜，双向旋转效果
棱镜盘2：16棱镜，双向旋转效果
调焦：图案可任意调节清晰
防水等级：IP20

Parameter:

Light source: 80LED white light module
Maximum power: 250W
Power supply: wide voltage input switching power supply 100V-240V 50-60Hz
Color temperature: 7000k to 8000k
Bead life: 50000 hours
Spot Angle: 2°
Control mode: DMX512, master and slave operation
Channel mode :16CH/20CHSupport RDM function, DMX software upgrade function
Optional network function support: Artnet,sACN, network protocol
X/Y scan: Horizontal 540° , Vertical 270°
Color: 13 color plates + pure white light, rainbow effect, can be arbitrarily positioned
Fixed pattern: 12 fixed patterns, shaking water effect6 color: an independent
6 color plate, can realize the pattern rainbow effect
Atomizing mirror: Atomizing soft light mirror
Dimming: 0-100% linear dimming
Stroboscope: Synchronous pulse stroboscope, random pulse stroboscope
Prism disc 1:8 prisms, bidirectional rotation effect
Prism plate and prism, two-way rotation effect
Focus: the pattern can be adjusted arbitrarily clear
Waterproof rating: IP20

Size photo:









CZ-H380 380W防水光束灯

380W waterproof beam lamp


技术参数：


额定电压：AC110V-AC240V，50/60HZ
功率：700W
光源：原装欧司朗371灯泡
保险丝：7A
光源寿命：1500小时
色温：8000K
光束角度：0-2.8°
水平垂直：水平扫描角度540度，垂直扫描角度270度
频闪：0-10次/秒，速度可调
固定图案：一个固定图案轮17个图案+1个白光
固定颜色：一个固定颜色轮14个色片+1个白光，带彩虹效果和半色效果
棱镜：8棱镜
控制方式：DMX512，主从，自走
显示界面：液晶显示，可切换中英文
控制通道：20/16CH
防护等级：IP65
外壳材料：铝+阻燃ABS
产品净重：25.2KG
产品毛重：28.5KG
使用场所：适用于户外演出、景观亮化，公园，大楼地标
纸箱尺寸：70x60x52cm

Parameter:

Rated voltage: AC110V-AC240V, 50/60Hz
Power: 700w
Light source: original OSRAM 371
Fuse: 7A
Light source life: 1500 hours
Color temperature: 8000k
Beam Angle: 0-2.8°
Horizontal and vertical: horizontal scanning Angle 540 degrees, vertical scanning Angle 270 degrees
Stroboscope: 0-10 times/second, adjustable speed
Fixed pattern: a fixed pattern wheel with 17 patterns +1 white light
Fixed color: a fixed color wheel 14 color patches +1 white light, with rainbow effect and half color effect
Prism: 8 prism
Control mode: DMX512, master - slave, self - walking
Display interface: LCD display, Chinese and English can be switched
Control channel: 20/16CH
Protection class: IP65
Shell material: aluminum + flame retardant ABS
Net weight: 25.2kg
Gross weight: 28.5kg
Place of use: suitable for outdoor performance, landscape lighting, parks, building landmarks
Carton size: 70x60x52cm



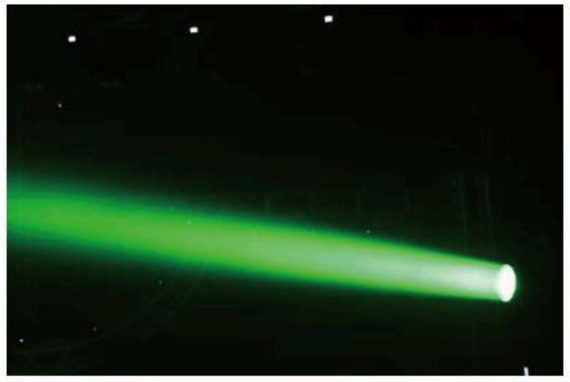

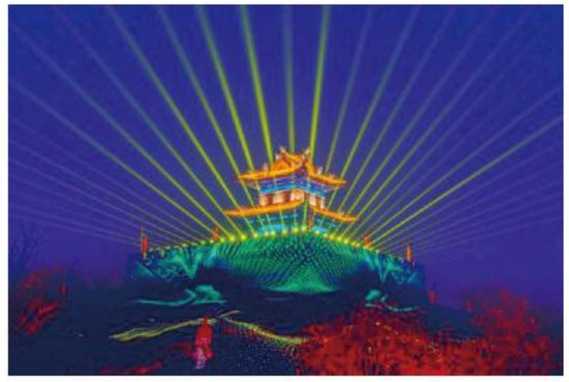

380W三合一防水光束灯 CZ-H380A

380W three in one waterproof beam lamp



技术参数:

输入电压: 110V-240V AC, 50/60Hz;
额定功率: 700W;
灯泡规格: 371W Osram
额定寿命: 1500小时;
颜色盘: 1个颜色盘: 13个颜色+白光, 可变速双向彩虹效果;
图案盘: 1个固定图案盘,1个旋转图案盘;具有变速抖动效果, 双向变速流动效果;
棱镜: 16棱镜可双向变速旋转;
调焦: 0~100%线性调焦;
放大: 线性放大;
雾化: 1个雾化片, 0-100%线性调节;
频闪调光: 双片式频闪, 线性调光;
旋转角度: 水平方向540° 旋转; 垂直方向270° 旋转; 16BIT 微调, 自动纠错回位功能;
光束角度: 0-45° 带放大功能;控制方式: 国际标准DMX512信号; 支持RDM功能;主从同步控制模式、自走模式、声控模式;
通道数量: 18个通道;
其他功能: 高精密胶合光学镜头; 水平垂直速度可调, 自动纠错功能; 显示灯具, 灯泡使用时间便于维护; 风机自动调速功能; 机械闭光时自动降低50%
光源功率;防护等级: 耐高温精密注塑外壳, IP65 防水等级设计;
每条接缝处均有高弹性斥水胶带内嵌密封, 确保内部机件不受外部雨水冲刷的影响;
产品尺寸: 45x40x70cm;
包装尺寸: 53x53x72.5cm;
净重: 29kgs
毛重: 34kgs

Parameter:

nput voltage: 110v-240v AC, 50 / 60Hz;
Rated power: 700W;
Bulb specification: 371w OSRAM
Rated life: 1500 hours;
Color disk: 1 color disk: 13 colors + white light, variable speed two-way rainbow effect;
Pattern disk: 1 fixed pattern disk, 1 rotating pattern disk;
It has the effect of variable speed jitter and bidirectional variable speed flow;
Prism: 16 prism can rotate in two directions with variable speed;
Focusing: 0 ~ 100% linear focusing;
Amplification: linear amplification;
Atomization: 1 atomizing tablet, 0-100% linear adjustment;
Stroboscopic dimming: double chip stroboscopic, linear dimming;
Rotation angle: horizontal 540 ° Rotation; Vertical 270 ° Rotation; 16bit fine adjustment, automatic error correction and return function;
Beam angle: 0-45 ° With amplification function;
Control mode: international standard DMX512 signal; Support RDM function; Master and slave
Synchronous control mode, self-propelled mode and voice control mode;
Number of channels: 18 channels;
Other functions: high precision gluing optical lens; Horizontal and vertical speed adjustable, automatic error correction function; Display lamps, The service life of the bulb is easy to maintain; Fan automatic speed regulation function; Automatically reduce 50% when mechanical light is closed
Light source power; Protection grade: high temperature precision injection shell, IP65 waterproof grade design;
Each joint has a high elastic water repellent tape embedded seal to ensure that the internal parts are not affected by the external rain;
Product size: 45x40x70cm;
Package size: 53x53x72.5cm;
Net weight: 29kgs
Gross weight: 34kgs





CZ-Q6600 LED600W摇头切割灯

LED600W moving head cutting lamp

技术参数:

AC100~240v,50/60Hz
输入功率: 850W
LED类型: 大功率600W白光LED模组
色温: 6300K
LED寿命: 20,000小时
光斑均匀度: 90%
水平扫描: 540° (16 bit精度扫描), 微调精度0.008°
垂直扫描: 270° (16 bit精度扫描), 微调精度0.008°
均匀顺滑的CMY+CTO混色系统
1个色片盘: 6个固定式色片+白光, 可实现双向颜色彩虹
1个旋转图案盘: 6个插拔式的旋转图案片+白圆, 可实现自转、流水、抖动效果
1个固定图案盘: 7个固定图案片+白圆, 带图案抖动功能
动感效果盘: 超炫模拟动感窜动的火焰, 潺潺流水等动态效果.
2种通道模式: 34/54个国际标准DMX512通道控制模式
控制协议: 标准DMX512协议, RDM数据双向传送
棱镜盘: 旋转五棱镜, 可正反方向旋转, 并具有棱镜定位功能
调焦: 电子调焦, 超微顺滑调整焦距
光圈: 5%~100%顺滑调整
频闪: 频率最高可以达到25Hz, 电了频闪速度为1-13次/秒
调光: 0~100%线性调光
雾化: 0~100%线性雾化
放大: 7° ~ 42° 线性放大
切割盘: 一组由8个切角刀片组成可控制的光斑切角系统
温度电子传感检测
DMX通道电平监视

Parameter:


AC100~240v,50/60Hz
Input power: 850W
LED type: high power 600W white LED module
Color temperature: 6300k
LED life: 20000 hours
Spot uniformity: 90%
Horizontal scanning: 540° (16 bit precision scanning), fine tuning accuracy 0.008°
Vertical scanning: 270° (16 bit precision scanning), fine tuning accuracy 0.008°
Uniform and smooth CMY+CTO color mixing system
1 color plate: 6 fixed color plates + white light, can achieve two-way rainbow color
1 rotating pattern plate: 6 pluggable rotating pattern plates + white circles, which
can realize the effect of rotation, flowing water and jitter
1 fixed pattern plate: 7 fixed pattern plates + white circle, with pattern shaking function
Dynamic effect plate: super dazzling simulation dynamic fire, babbling water and other dynamic effects.
Two channel modes: 34/54 international standard DMX512 channel control modes
Control protocol: standard DMX512 protocol, RDM data bidirectional transmission
Prism disc: rotate pentaprism, can rotate in positive and negative directions, and has the prism positioning function
Focus: electronic focus, ultra-fine smooth focus adjustment
Aperture: 5%~100% smooth adjustment
Stroboscopic: Frequency up to 25Hz, electric stroboscopic speed of 1-13 times/second
Dimming: 0~100% linear dimming
Atomization: 0~100% linear atomization
Magnification: 7° ~ 42° linear magnification
Cutting disc: a set of 8 corner cutting blades composed of a controlled light spot corner cutting system
DMX channel level monitoring
Carton Size:
Weight:

Size photo:









LED100W摇头光束图案灯 CZ-L100D

LED100W shaking head beam pattern lamp



技术参数：

光通量：8000LM
驱动电流: 15.5A
光源：1颗白色100W LUMINUS 进口高亮度LED灯珠
电压：输出电压 100~240VAC
额定功率: 200W
控制模式：自走/主从/声控
调焦：电子调焦
调光：0-100%
电子变焦：15°
光束角度：15°
频闪：0-20 Hz
棱镜：可旋转五棱镜
通道：14CH
扫描角度：水平 540° 垂直 270°
扫描精度：微调 8-16bit
特殊功能：水平/垂直可设定在运行中闭光，水平/垂直扫描角度范围可设
旋转图案：1个玻璃图案+5个金属图案(可互换)，带图案流水效果，
图案抖动，正反方向旋转
静态图案：8个金属图案
色彩：7个色片 + 白光，彩虹流水效果
防水等级：IP20
纸箱尺寸：41x28x33cm
净重：7.4kg

Parameter:

Luminous flux: 8000lm
Driving current: 15.5a
Light source: 1 White 100 W luminus imported high brightness LED lamp bead
Voltage: output voltage 100 ~ 240VAC
Rated power: 200W
Control mode: self-propelled / master-slave / voice control
Focusing: electronic focusing
Dimming: 0-100%
Electronic zoom: 15 ° Beam angle: 15 ° Stroboscopic: 0-20 Hz
Prism: rotatable pentaprism
Channel: 14ch
Scanning angle: horizontal 540 ° Vertical 270 °
Scanning accuracy: fine tuning 8-16bit
Special functions: horizontal / vertical can be set to close the light in operation, horizontal / vertical scanning angle range can be set
Rotation pattern: 1 glass pattern + 5 metal patterns (interchangeable), with patterned water effect,
Pattern jitter, positive and negative rotation
Static pattern: 8 metal patterns
Color: 7 color chips + white light, rainbow water effect
Waterproof grade: IP20
Carton size: 41x28x33cm
Net weight: 7.4kg

Size photo:





CZ-L19A LED19颗大蜂眼染色灯

LED19 big bee eye dyeing lamp

技术参数：

电压：AC90-240V 50-60Hz
功率：450W
光源：19颗OSRAM 四合一15W高亮度灯珠
光束角度：4-60°
颜色：RGBW无极混色，色温可从8000K到2500K精确调整
调光：0-100%线性调光系统
频闪：1-25次/秒高速频闪效果。速度可调，带随机频闪及脉冲频闪
水平扫描：540度+16 bit微调
垂直扫描：250度+16 bit微调
控制信号：DMX512,主从机,声控或者自走程序
通道：21CH(标准)，23CH/35CH(图像) /78CH（可延伸）/96CH(RGBW可延伸) /92CH（全）
产品尺寸：520*420*560mm
净重：15Kg

Parameter:

Voltage: AC90-240V 50-60Hz
Power: 450w
Light source: 19 OSRAM 4-in-1 15W high brightness beads
Beam Angle: 4-60°
Color: RGBW poleless color mixing, color temperature can be accurately adjusted from 8000K to 2500K
Dimming: 0-100% linear dimming system
Strobbing: 1-25 times/SEC high speed strobbing effect, adjustable speed, with random strobbing and pulse strobbing
Horizontal scan: 540 degrees +16 bit fine tuning
Vertical scan: 250 degrees +16 bit fine tuning
Control signal: DMX512, master and slave, voice control or automatic program
Channel: 21CH(Standard), 23CH/35CH(Image) /78CH (Extensible) /96CH(RGBW Extensible) /92CH (Full)
Product size: 520*420*560mm
Net weight: 15 kg



CZ-L74D LED7*40W摇头染色灯

LED7*40W head dyeing lamp

技术参数：

LED数量：7X40W（RGBW）
驱动电流：2.5A
最大功率：400W
电源：宽电压输入开关电源100V-240V 50-60Hz
色温：2800K-8500K
灯珠寿命：50000 hours
光斑角度：4.5°-45°
控制方式：DMX512，主从运行
整体控通道模式:12CH/17CH
点控通道模式:11CH/17/18CH/38
支持RDM功能，DMX软件升级功能
选配网络功能支持：Artnet,Klingnet,sACN,网络协议
X/Y扫描：水平540°，垂直：270°
调焦：高静音电机精密调焦光斑无抖动
显示：彩色液晶显示，中英文显示，可倒转显示
频闪：1-20Hz
调光：0-100%（16bit）
工作环境温度：0°C-45°C
高效散热系统，全程温度监测，过温自动调节保护，无灯珠烧坏风险智能调速风机，实时显示转速
防水等级：IP20
产品尺寸：39x30x49cm
净重：13kg

Parameter:

LED quantity: 7x40W (RGBW)
Drive current: 2.5A
Maximum power: 400W
Power supply: wide voltage input switching power supply 100V-240V 50-60Hz
Color temperature: 2800k to 8500k
Bead life: 50000 hours
Spot Angle: 4.5°-45°
Control mode: DMX512, master and slave operation
Overall control channel mode :12CH/17CH
Point control channel mode :11CH/17/18CH/38
Support RDM function, DMX software upgrade function
Optional network function support: Artnet,Klingnet,sACN, network protocol
X/Y scan: Horizontal 540°, Vertical 270°
Focusing: high - mute motor precision focusing spot without jitter
Display: color liquid crystal display, Chinese and English display, reversible display
Stroboscopic: 1-20 hz
Dimming: 0-100% (16bit)
Operating ambient temperature: 0°C-45°
CHigh efficiency cooling system, whole-process temperature monitoring, over-temperature automatic regulation protection
No lamp bead damage risk intelligent speed regulating fan, real-time display speed
Waterproof rating: Ip20
Product size: 39x30x49cm
Net weight: 13 kg



CZ-L1240 12颗*40WLED摇头染色灯

12 *40WLED oscillating dyeing lights

技术参数：

输入电压：AC100-240V，50Hz/60Hz
功率：550W
光源：12x40w欧司朗RGBW 4合1 LED灯珠
光束角度：4.5-45°
水平旋转角度：540°
垂直旋转角度：270°
驱动电流：2.2A
频闪：1-20次/秒
灯体颜色：黑色
颜色：RGBW混色系统，能混成千上万种颜色，色彩均匀亮丽
像素控制，可以三点控
DMX通道：17CH/ 25CH/18CH/11CH
控制模式：自走/声控/ DMX512/主从
Micro USB，支持RDM功能，DMX地址设置和软件升级，无需连接电源
电源连接：音频插输入和输出
DMX 3芯和5芯输入和输出
尺寸：390×290×420mm
净重：14.5kg

Parameter:

Input voltage: AC100-240V, 50Hz/60Hz
Power: 550w
Light source: 12x40W Osram RGBW 4 in 1 LED bead
Beam Angle: 4.5-45°
Horizontal rotation Angle: 540°
Vertical rotation Angle: 270°
Drive current: 2.2A
Stroboscope: 1-20 times/second
Color of lamp body: black
Color: RGBW color mixing system, can be mixed into thousands of colors, color uniform brightPixel control, three point control
DMX channel: 17CH/ 25CH/18CH/11CH
Control mode: self/voice/DMX512/ master slave
Micro USB, support RDM function, DMX address Settings and software upgrades, no need to connect to power
Power connection: audio plug input and output
DMX 3-core and 5-core input and output
Size: 390 * 290 * 420 mm
Net weight: 14.5 kg



37颗摇头染色灯 CZ-L3715

37 shaking colored lamps



技术参数：

输入电源： AC 100~240V, 50/60Hz
光源： 37x15W RGBW LED
LED 预期使用寿命: 20000 小时
总功率： 600W
电子线性调焦系统
缩放角度： 10°~60°
CTO色温调节(2500K-8000K)
集强大的光束、染色功能于一体
先进的光学系统确保清晰且大范围的光束及染色效果
6倍高效的变焦光学系统
控制模式: DMX512，RDM，自走，主从，声控
控制通道:24CH/48CH
X轴/Y轴：16 bit 精度扫描，X轴540°，Y轴270°，
采用光电复位系统，可自动检索复位
调光/频闪： 0~100%顺滑调光，多种频闪速度可调
最大联机数量:
3台 (120V, 60Hz)
5台 (230V, 50Hz)
可承受的最高环境温度: 45° C
可承受的最高表面温度: 65° C
可承受的最低工作温度: -5° C
灯体尺寸：40*40*30CM
灯重量：15KG

Parameter:

Input power: AC 100~240V, 50/60Hz
Light source: 37x15W RGBW LED
Expected service life of LED: 20,000 hours
Total power: 600W
Electronic linear focusing system
Zoom Angle: 10°~60° CTO color temperature adjustment (2500K-8000K)
Set powerful beam, dyeing function in one
Advanced optical system ensures clear and wide range of beam and dye effects
6 times efficient zoom optical system
Control mode: DMX512, RDM, self-propelled, master-slave, voice control
Control channel :24CH/48CH
X-axis/Y-axis: 16 bit precision scanning, X-axis 540°, Y-axis 270°, photoelectric reset system, automatic retrieval reset
Dimming/Strobbing: 0~100% smooth dimming, a variety of strobbing speed adjustable
Maximum online number:
3 (120 v, 60 hz)
5 (230 v, 50 hz)
Maximum tolerable ambient temperature: 45° C
Maximum tolerable surface temperature: 65° C
Minimum acceptable operating temperature: -5° C
Lamp body size: 40*40*30CM
Light weight: 15KG

36颗摇头染色灯 CZ-L3612

36 shaking head dyeing lamps



技术参数：

电压： AC100-240V/50-60Hz
功率： 400W
灯珠： 36pcs x 10W
通道： 16CH
频闪： 1-10次/秒 极致频闪
调光： 0-100%，线性电子
变焦： 10-60°
X轴： 水平旋转最大角度630度 16bit
Y轴： 垂直旋转最大角度240度 16bit
微调： 水平、垂直旋转1.8度
颜色： RGBW混色
控制模式： DMX-512，主/从机控制，声控
净重： 10kg
包装尺寸： 420×330×640mm 1台/纸箱

Parameter:

Voltage: AC100-240v / 50 to 60hz
Power: 400w
Lamp bead: 36 PCS x 10w
Channel: 16ch
Stroboscopic: 1-10 times per second
Dimming: 0-100%, linear electrons
Zoom: 10 to 60 °
X axis: maximum horizontal rotation Angle 630 degrees 16bit
Y axis: maximum vertical rotation Angle 240 degrees 16bit
Fine tuning: horizontal and vertical rotation of 1.8 degrees
Color: RGBW mixed color
Control mode: DMX-512, master/slave control, voice control
Net weight: 10 kg
Packing size: 420×330×640mm 1 set/carton

19颗调焦摇头染色灯 CZ-L1915

19 focal-turning colored lights



技术参数：

输入电压： AC100-240V, 50Hz/60Hz
最大功率： 300W
LEDs: 19x15w OSRAM RGBW 4合1 LED灯珠
调焦角度: 8-60°
X轴: 540°
Y轴: 190°
频闪: 1-20次/秒
颜色: RGBW颜色混色系统，效果更佳颜色更亮
DMX512通道: 11CH/21CH /37CH
控制模式: 自走，声控，DMX512，主从
功能: RGBW颜色混色系统，色彩均匀明亮
0-100%线性调光
风扇智能控制
LCD显示屏，中英文界面切换
照明温度自动检测
电源连接: 音响插一进一出
信号接口3pin，5pin可选
产品尺寸: 30.5×23×37cm
卡通箱尺寸: 45×26×39cm (1装1)
净重: 8kg
毛重: 10kg

Parameter:

Input voltage: AC100-240V, 50Hz/60Hz
Maximum power: 300W
LEDS: 19x15W OSRAM RGBW 4 in 1 LED beads
Focus Angle: 8-60°
X: 540 °
Y: 190 °
Stroboscope: 1-20 times/second
Color: RGBW color mixing system, better effect and brighter color
DMX512 channel: 11CH/21CH /37CH
Control mode: self - drive, voice control, DMX512, master - slave
Function: RGBW color mixing system, color uniform and bright
0-100% linear dimming
Intelligent fan control
LCD display, Chinese and English interface switch
Automatic detection of lighting temperature
Power connection: stereo plug in and out
Signal interface 3PIN, 5PIN optional
Product size: 30.5×23×37cm
Cartoon box size: 45×26×39cm (1 pack 1)
Net weight: 8kg
Gross weight: 10kg

CZ-L1083 108颗LED摇头染色灯

108 LED swing dyeing lights

技术参数：

电压： AC90V-260V,50/60Hz
功率： 140W/350W
LED数量： 108pcs 1W/3W LED
DMX通道： 15CH
控制模式： DMX512信号控制/主从/声控
水平扫描： 540° (16bit精度扫描)
垂直扫描： 270° (16bit精度扫描)
透镜角度： 光学透镜角度标准15° 另可选8°，25°，30°，45°，60°
机身尺寸： 337×228×220mm
净重： 9kg

Parameter:

Voltage: AC90V - 260v, 50/60hz
Power: 140w / 350w
LED Quantity: 108pcs 1W/3W LED
DMX channel: 15CH
Control mode: DMX512 signal control/master-slave/voice control
Horizontal scanning: 540° (16bit precision scanning)
Vertical scan: 270° (16bit precision scan)
Lens Angle: Optical lens Angle standard 15°, optional 8°, 25°, 30°, 45°, 60°
Body size: 337×228×220mm
Net weight: 9kg





CZ-L2515 25头摇头矩阵灯

25 head shaking matrix lamp

技术参数：

电压： 110V-240V/50-60Hz
功率： 280W
光源： 25pcsx10W LED RGBW 4合1
寿命： 5000小时
颜色： RGBW 无限混色
颜色温度： 2300K
控制模式： DMX512、主/从内置
DMX通道： CH16/CH37/CH112
平行旋转角度： 无限旋转
垂直旋转角度： 无限旋转
光束角度： 平行光束角25°
线性可调快门/闪光灯： 1-100%
线性可调焦： 1-100%
防水等级： IP20
产品尺寸： 400x330x400mm
包装尺寸： 480x370x460mm
净重： 12kg
毛重： 14kg

Parameter:

Voltage: 110 v to 240v / 50 to 60hz
Power: 280w
Light source: 25PCSX10W LED RGBW 4 and 1
Life: 5000 hours
Color: RGBW unlimited color mix
Color temperature: 2300K
Control mode: DMX512, master/slave built-in
DMX channel: CH16/CH37/CH112
Parallel rotation Angle: Infinite rotation
Vertical rotation Angle: Infinite rotation
Angle of beam: Angle of parallel beam is 25°
Linear adjustable shutter/flash: 1-100%
Linear focus adjustable: 1-100%
Waterproof rating: IP20
Product size: 400x330x400mm
Packing size: 480x370x460mm
Net weight: 12kg
Gross weight: 14kg





CZ-CTO200-300-400 COB200W/300W/400W调焦摇头面光灯

COB200W/300W/400W focused head light

技术参数：

额定电压： AC100V-240V
额定频率： 50/60HZ
总功率： 200W-500W
光源： 200W 300W 400W COB 高亮度灯珠
色温： 6500K带线性CTO色温校正
寿命： 50000小时
调光： 0-100%线性调光
频闪： 频闪1-25Hz
IP防护等级： 室内IP20
出光角度： 电动调焦，调焦角度5-50度线性调节
控制信号： 国际标准 DMX512 信号
X轴运行角度： 540° (16bit) 线性校正
Y轴运行角度： 270° (16bit) 线性校正
通道数量： 10CH
控制方式： 主从，自走，标准DMX512，RDM,声控
工作环境： -20° C~40° C
产品毛重： 10.5kg
投射距离： 6-50m
包装尺寸： 52x34x27cm

Parameter:

Rated voltage: AC100V-240V
Rated frequency: 50/60Hz
Total power: 200W-500W
Light source: 200W 300W 400W COB high brightness bead
Color temperature: 6500K with linear CTO color temperature correctionLife: 50,000 hours
Dimming: 0-100% linear dimming
Stroboscopic: Stroboscopic 1-25Hz
IP protection level: indoor IP20
Light Angle: electric focusing, focusing Angle 5-50 degrees linear adjustment
Control signal: international standard DMX512 signal
X-axis running Angle: 540° (16bit) linear correction
Y axis running Angle: 270° (16bit) linear correction
Number of channels: 10CH
Control mode: master-slave, self-propelled, standard DMX512, RDM, voice control
Working environment: -20° C ~ 40° C
Gross weight: 10.5kg
Range: 6-50m
Packing size: 52x34x27cm





CZ-4COB200 4眼摇头面光灯

4 eyes shake the face light lamp

技术参数：

光源： 4颗50WCOB 正暖白二合一
色温： 冷白5600K暖白3200K可选
调光： 0-100%
通道： 12CH
控制模式： DMX512
产品尺寸： 220*230*320mm
光束角度： 12度
光源寿命： 100000小时
适用于剧院，婚庆，影视灯，多功能厅，室外演出等多种场合
防水等级： IP20
包装尺寸： 45x26x39cm

Parameter:

Light source: 4 50WCOB positive warm white two-in-one
Color temperature: cold white 5600K warm white 3200K optional
Dimming: 0-100%
Channel: 12ch
Control mode: DMX512
Product size: 220*230*320mm
Beam Angle: 12 degrees
Light source life: 100000hours
Suitable for theatre, wedding, film and television lights, multi-function hall
Outdoor performance and other occasions
Waterproof rating: Ip20
Packing size: 45x26x39cm





COB4眼帕灯 CZ-COB200A

COB4 eye lamp





技术参数：

工作电压：AC110V-240V
频率：50/60HZ
总功率：200W
灯珠功率：200W
灯珠数量：4颗50W灯珠
出光角度：25度（珠光面）
控制信号：DMX512
控制通道：8CH或4CH（可切换）
操作模式：DMX512、手动、自走、声控
智能风机控制与温度保护，达到超静音效果
防水等级：IP20
纸箱尺寸：25x25x36cm
重量：3.5kg

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Total power: 200W
Bead power: 200W
Number of lamp beads: 4 50W lamp beads
Light Angle: 25 degrees (pearlescent surface)
Control signal: DMX512
Control channel: 8CH or 4CH (switchable)
Operation mode: DMX512, manual, automatic, voice control
Intelligent fan control and temperature protection, to achieve more quiet effect
Waterproof rating: Ip20
Carton size: 25x25x36cm
Weight: 3.5 kg

COB200W帕灯 CZ-COB200

COB200W palmer lamp





技术参数：

工作电压：AC110V-240V
频率：50/60HZ
额定总功率:200W
灯珠功率：LED200W
控制信号：DMX512
控制通道:6CH
防水等级：IP20
纸箱尺寸：25x25x36cm
重量：3.5kg

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Rated total power :200W
Bead power: LED200W
Control signal: DMX512
Control channel :6CH
Waterproof rating: Ip20
Carton size: 25x25x36cm
Weight: 3.5 kg

LED四眼防水帕灯 CZ-H4COB200

LED 4eye waterproof lamp





技术参数：

工作电压：AC110V-240V
频率：50/60HZ
总功率：200W
灯珠功率：200W
灯珠数量：4颗50W灯珠
出光角度：25度（珠光面）
控制信号：DMX512
控制通道：8CH或4CH（可切换）
操作模式：DMX512、手动、自走、声控
防水等级：IP65

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Total power: 200W
Bead power: 200W
Number of lamp beads: 4 50W lamp beads
Light Angle: 25 degrees (pearlescent surface)
Control signal: DMX512
Control channel: 8CH or 4CH (switchable)
Operation mode: DMX512, manual, automatic, voice control
Waterproof rating: IP65

100W COB帕灯 CZ-COB100

100W COB Par Light





技术参数：

电压：AC100-240V 50/60Hz
功率：130W
光源：100W COB
颜色：正白（5600k），暖白（3200k），
双色(3200-5600k)
平均寿命：10万小时
控制模式：DMX512、主从、声控、自走
通道：1CH/2CH
调光：0-100%的线性调光
频闪：1-20次/秒
角度：30/60
防水等级：IP20
尺寸：25×25×36cm
重量：3.5kg

Parameter:

Voltage: AC100-240V 50/60Hz
Power: 130w
Light source: 100W COB
Color: white (5600K), warm white (3200K),
Double color (3200-5600 k)
Life expectancy: 100,000 hours
Control mode: DMX512, master-slave, voice control, self - walking
Channel: 1ch/2ch
Dimming: 0-100% linear dimming
Stroboscope: 1-20 times/second
Angle: 30/60
Waterproof rating: IP20
Size: 25*25*36cm
Weight: 3.5kg

COB200W防水帕灯 CZ-HCOB200

COB200W waterproof lamp





技术参数：

电压：AC 110V-220V/50-60HZ
总功率：240W
光源：200W COB灯珠
色温：3200K，5600K 可选
(可选暖白，正白防水色温可调)
光源寿命：50000-100000 hours
控制信号：DMX512
控制模式：自走，主从
DMX通道：2/6通道
发光角度：45°
射程：20米
防护等级：IP65
产品尺寸：30x25x41cm
净重：8KG

Parameter:

Voltage: AC 110V-220V/ 50-60Hz
Total power: 240W
Light source: 200W COB lamp bead
Color temperature: 3200K, 5600K optional
(optional warm white, white waterproof color temperature adjustable)
Light source life: 50,000-100000 hours
Control signal: DMX512
Control mode: self-propelled, master-slave
DMX channel: 2/6 channel
Light Angle: 45°
Range: 20 m
Protection grade: IP65
Product size: 30x25x41cm
Net weight: 8kg

CZ-HCOB300 COB300W调焦面光灯

COB300W focus surface light lamp

技术参数：

输入电源：AC100~240V, 50/60Hz
额定功率：300W
光源：进口300W COB LED模组
寿命：6~10万小时
色温:5600K
调焦：电动调焦
光束角度：15°到/60°
控制运行模式:DMX512控制，内置运行程序，声控，
频闪，主从机功能
防护等级：IP65
高显指，CRI≥95
超高亮度，节能高效，0~100%顺滑调光
灯具尺寸：280*185*38CM
净重：7KG

Parameter:

Input power: AC100~240V, 50/60Hz
Rated power: 300W
Light source: imported 300W COB LED module
Life: 60 ~ 100 thousand hours
Color temperature: 5600 k
Focus: Electric focus
Beam Angle: 15° to /60°
Control operation mode :DMX512 control, built-in operation program, voice control,Stroboscopic, master and slave functions
Protection grade: IP65
High index, CRI≥95
High brightness, energy saving and high efficiency,
0~100% smooth dimming
Lamp size: 280*185*38CM
Net weight: 7kg





CZ-L18B 18颗/24颗全彩LED帕灯

18pcs / 24pcs full color LED lamp

技术参数：

电压：AC100-240V 50/60Hz
总功率：200W
光源：18颗/24颗12W大功率灯珠
光源寿命：5-10万个小时
光束角度：25°/45°可选
控制方式：标准DMX512信号，主从同步，自走
2种DMX通道：4通道/8通道
调光：0-100%线性调光
频闪：1-20次/秒
防水等级：IP20
净重：3kg
尺寸：300×215×330mm

Parameter:

Voltage: AC100-240V 50/60Hz
Total power: 200W
Light source: 18/24 12W high-power lamp beads
Light source life: 50,000-100000 hours
Beam Angle: 25° /45° optional
Control mode: standard DMX512 signal, master - slave synchronization, self - walking
2 types of DMX channels: 4 /8 channels
Dimming: 0-100% linear dimming
Stroboscope: 1-20 times/second
Waterproof rating: IP20
Net weight: 3kg
Size: 300 * 215 * 330 mm





CZ-L1B 54颗3W LED帕灯

54pcs x 3W LED cast aluminum lamp

技术参数：

工作电压：AC110V-240V
频率：50/60HZ
额定总功率：200W
灯珠功率：3W暖白
灯珠数量：54颗
出光角度：25度（珠光面）
控制信号：DMX512
控制通道：4CH或8CH（可切换）
操作模式：DMX512、手动、自走、声控
净重：4.3KG
尺寸：300×295×330mm

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Rated total power: 200W
Bead power: 3W warm white
Number of lamp beads: 54
Light Angle: 25 degrees (pearlescent surface)
Control signal: DMX512
Control channel: 4CH or 8CH (switchable)
Operation mode: DMX512, manual, automatic, voice control
Net weight: 4.3 KG
Size: 300 * 295 * 330 mm





CZ-L18C 72颗3W LED帕灯

72pcs x3W LED cast lamp

技术参数：

工作电压：AC110V-240V
频率：50/60HZ
额定总功率：250W
灯珠数量：72颗x3WRGBW灯珠
出光角度：25°45°可选
控制信号：DMX512
控制通道：4CH/8CH
操作模式：DMX512、手动、自走、声控
防水等级：IP20

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Total rated power: 250W
Number of lamp beads: 72 X3WRGBW lamp beads
Light Angle: 25° 45° optional
Control signal: DMX512
Control channel: 4CH/8CH
Operation mode: DMX512, manual, automatic, voice control
Waterproof rating: IP20





CZ-L18D 120颗3W LED铸铝帕灯

120pcs x3W LED cast aluminum lamp

技术参数：

工作电压：AC110V-240V
频率：50/60HZ
额定总功率：400W
灯珠数量：120颗x3WRGBW灯珠
出光角度：25°45°可选
控制信号：DMX512
控制通道：4CH/8CH
操作模式：DMX512、手动、自走、声控
防水等级：IP20

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Total rated power: 400W
Number of lamp beads: 120 X3WRGBW lamp beads
Light Angle: 25° 45° optional
Control signal: DMX512
Control channel: 4CH/8CH
Operation mode: DMX512, manual, automatic, voice control
Waterproof rating: IP20





54颗3W LED防水帕灯 CZ-L16

54pcs x 3W LED waterproof lamp





技术参数：

额定电压：AC110-240V，50/60Hz
额定功率：180W
光源：54颗*3W(RGBW)四色/三合一（3in1）LED灯珠
光源寿命：≥50000小时
透镜角度：15度／25度(标配)／45度可选
控制模式：DMX512,自走,声控及主从机模式。
通道：4/8CH(四色)，3/7CH（三合一）
调光：0-100%线性调光
频闪：1-20次/秒
混色：RGB线性混色，内置宏功能，混色效果可达1670多万种颜色
显示：数码管数码显示
防护等级：IP65

Parameter:

Rated voltage: ac110-240v, 50 / 60Hz
Rated power: 180W
Light source: 54 * 3W (RGBW) four color / three in one (3in1) led beads
Light source life: ≥ 50000 hours
Lens angle: 15 degrees / 25 degrees (standard configuration) / 45 degrees
Control mode: DMX512, self-propelled, voice control and master-slave mode.
Channel: 4 / 8CH (four colors), 3 / 7ch (three in one)
Dimming: 0-100% linear dimming
Stroboscopic: 1-20 times / second
Color mixing: RGB linear color mixing, built-in macro function, color mixing effect can be achieved16.7 million colors
Display: nixie tube digital display
Protection grade: IP65

18颗/24颗全彩LED防水帕灯 CZ-L16A

18pcs/24pcs full-color LED waterproof lamp





技术参数：

工作电压：AC110V-240V
频率：50/60HZ
额定总功率：200W
灯珠数量：18/24颗四合一灯珠
出光角度：25°45°可选
控制信号：DMX512
控制通道：4CH/8CH
操作模式：DMX512、手动、自走、声控
防水等级：IP65

Parameter:

Working voltage: AC110V-240V
Frequency: 50/60 hz
Rated total power: 200W
Number of lamp beads: 18/24 four in one lamp beads
Light Angle: 25° 45° optional
Control signal: DMX512
Control channel: 4CH/8CH
Operation mode: DMX512, manual, automatic, voice control
Waterproof rating: IP65

LED景观灯 CZ-C0880

LED landscape light





技术参数：

电源：AC100-240V 50-60Hz
总功率：100W
光源：1颗100W（正白/暖白/双色）
色温：3200-5600K
通道：2CH
功能：程序自走，自编程序，偏色校正，色温设置，菜单设置，静态设置，DMX512受控执行和主从机设置，DMX512地址码设置，DMX512通道模式设置
菜单显示：LCD数码显示
控制：DMX512,声控，自走，主从控制
防水等级：IP20
风机自然散热

Parameter:

Power supply: AC100-240V 50-60Hz
Total power: 100W
Light source: 1 100W (positive white/warm white/dual color)
Color temperature: 3200-5600k
Channel: 2ch
Function: program, self-programmed, color bias correction,Color temperature setting, menu setting, static setting, DMX512 controlled executionArd master and slave machine Settings, DMX512 address code Settings, DMX512 channel mode Settings
Menu display: LCD digital display
Control: DMX512, voice control, self - walking, master - slave control
Waterproof rating: IP20
Natural heat dissipation of fan

LED54颗*3W嵌入式帕灯 CZ-Q18

LED54 *3W embedded lamp





技术参数：

额定电压：AC110/230V+10%
额定频率：50Hz~60Hz
额定功率：200W
光源：3WLED
灯珠数量：54颗
颜色：正白与暖白灯珠
通道数：8个DMX512通道
工作环境：室内，外
控制模式：自走，DMX512，主从同步
防水等级：IP20

Parameter:

Rated voltage: AC110/230V+10%
Rated frequency: 50Hz~60Hz
Rated power: 200W
Light source: 3 wled
Number of lamp beads: 54
Color: white and warm white light beads
Number of channels: 8 DMX512 channels
Working environment: indoor, outdoor
Control mode: self - drive, DMX512, master - slave synchronization
Waterproof rating: IP20

COB100W嵌入式面光灯 CZ-QCOB100

COB100W recessed surface light





技术参数：

额定电压：AC110/230V+10%
额定频率：50Hz~60Hz
额定功率：150W
光源：单颗100W COB灯珠
灯珠数量：1颗
颜色:白
通道数：2/6个DMX512通道
工作环境：室内，外
控制模式：自走，DMX512，主从同步
防水等级：IP20

Parameter:

Rated voltage: AC110/230V+10%
Rated frequency: 50Hz~60Hz
Rated power: 150W
Light source: Single 100W COB lamp bead
Number of lamp beads: 1
Color: white
Number of channels: 2/6 DMX512 channels
Working environment: indoor, outdoor
Control mode: self - drive, DMX512, master - slave synchronization
Waterproof rating: IP20

CZ-L1040 10颗LED40W摇头光束灯

10 LED40W head shaking beam lamps

技术参数：

电压:AC100~240V 50/60HZ
功率:10*40W（400W）
灯珠:10颗COB珠
控制方式:DMX512、自走、主从、声控、带RDM功能
通道:CH08、CH40
调光:32bit 0~100%线性调光
特点:染色+爆闪
工作温度:-30度~50度
频闪频率:1~30HZ
外观:金属、黑色
连接方式:DMX512输入输出/电源输入输出
IP等级:IP20
尺寸:104x12x19cm

Parameter:

Voltage: AC100 50/60 hz ~ 240 v
Power :10*40W (400W)
Light beads :10 COB beads
Control mode: DMX512, self - walking, master - slave, voice control, with RDM function
Channel :CH08, CH40
Dimming :32bit 0~100% linear dimming
Features: dye + flash
Operating temperature: -30 ℃ ~50 ℃
Stroboscopic frequency: 1~ 30Hz
Appearance: metal, black
Connection mode :DMX512 input/output/power input/output
IP rating: IP20
Size: 104x12x19cm



CZ-L640 6颗40W调焦条形灯

6x40W focusing strip lamps

技术参数：

LED数量：6X40W RGBW LED
驱动电流：2.5A
最大功率：350W
电源：宽电压输入开关电源100V-240V 50-60Hz
色温：2800K-8500K
灯珠寿命：50000 hours
光斑角度：3.5°-35°
控制方式：DMX512、主从运行;
通道模式：14CH/30CH/36CH/54CH/42CH
支持RDM功能，DMX软件升级功能
Y扫描：垂直：270°
调焦：高静音电机精密调焦光斑无抖动
显示：彩色液晶显示，中英文显示，可倒转显示
频闪：1-20Hz
调光：0-100%(16bit)
工作环境温度：0°C-45°C
高效散热系统，全程温度监测，过温自动调节保护，无灯珠损坏风险
智能调速风机，实时显示温度

Parameter:

Led quantity: 6x40w RGBW LED
Driving current: 2.5A
Maximum power: 350W
Power supply: wide voltage input switching power supply 100v-240v, 50-60Hz
Color temperature: 2800k-8500k
Lamp life: 50000 hours
Spot angle: 3.5° - thirty-five° Control mode: DMX512, master-slave operation,
Channel mode: 14ch / 30ch / 36ch / 54ch / 42ch
Support RDM function and software upgrade function
Y scan: vertical: 270° Focusing: high quiet motor, precise focusing, no spot jitter
Display: color LCD, Chinese and English display, inverted display
Stroboscopic: 1-20hz
Dimming: 0-100% (16bit)
Working environment temperature: 0° C-45° C
Efficient cooling system, full temperature monitoring, over temperature automatic regulation and protection, no risk of lamp damage
Inteligent speed control fan, real-time display temperature



CZ-L1630 LED三角灯

LED triangle light

技术参数：

电压:AC90V-240V
频率:50Hz/60Hz
功率:250W
主光:16*10W
金黄色辅光:576*0.2W红绿蓝LED灯珠
通道模式:8CH/68CH
DMX接头:3Pin XLR
操作模式:DMX512/自动
显示方式:LCD
用户可将多个灯具进行无缝拼接，通过专业编程，可给舞台带来更炫目更多彩的特别更广效果。
产品支持DMX控制，RDM控制，软件可通过DMX信号线进行升级。产品的外观设计前卫，平衡感强，大方得体，内部整体构造合理，简单，和谐。

Parameter:

Voltage: AC90V - 240v
Frequency: 50hz/60hz
Power: 250w
The main light: 16*10w
Golden auxiliary light :576*0.2W red, green and blue LED beads
Channel mode :8CH/68CH
DMX connector :3Pin XLR
Operation mode :DMX512/ automatic
Display mode :LCD
Users can be a plurality of lamps and lanterns for seamless splicing, through professional programming, can bring to the stage more dazzling more colorful special wider effect.
Product support DMX control, RDM control, software can be through DMX letterLine number is upgraded. The appearance design of the product is avant-garde, the sense of balance is strong, bigThe square is decent, the internal whole structure is reasonable, simple, harmonious.



CZ-L39 LED乌龟灯

LED the turtle light

技术参数：

输入电压：AC100-240V，50/60Hz
额定功率：8W
灯珠：39颗3535RGB 3合1灯珠
控制方式：DMX ART-NET
接线：公母插
防水等级：IP20

Parameter:

Input voltage: AC100-240V, 50/60Hz
Rated power: 8W
Light beads: 39 3535RGB 3 in 1 lamp beads
Control mode: DMX ART-NET
Wiring line: male and female plug
Waterproof rating: IP20



LED升降球 CZ-510

LED lifting ball



技术参数：

工作电压：AC100V-240V50/ 60Hz
光源：6颗3合1灯珠单科灯珠3W
总功率：35W .
工作时允许环境温度：5℃-45℃ 7个控制通道
控制模式：DMX512控制系统/主从/自走红.绿.蓝.白四色可分别单独调光，256级亮度控制，无闪烁及多种频闪效果
升降幅度：1 .5米升降-12米
吊挂重量：2.5kg
防水等级：IP20
升降机箱尺寸：200x130x250mm
纸箱包装尺寸：275x255x170mm
重量：机箱：5.5kg 毛重6.5kg

Parameter:

Working voltage: AC 100V-240V 50/60Hz
Light source: 63in 1 lamp beads single family lamp beads 3W
Total power: 35W
Allowable ambient temperature when working: 5° C-45° C 7 control channels
Control mode: DMX5 12 control system/master-slave/self-running red. Green, blve and white can be dimmed separately .256 level brightness control, no flicker and a variety of stroboscopic effect
Lifting range: 1 .5m
Lifting range: -12m
Hanging weight: 2.5kg
Waterproof rating: IP20
Lifting box size: 200x 130x250mm
Carton packing size: 275x255x170mm
Weight: chassis: 5.5kg gross weight 6.5kg

2 5眼* 10W/30W三合一矩阵灯 CZ-LD6D

25 eyes *10W/30W 3in1 matrix lamp



技术参数：


输入电压：AC100-240V ，50/60HZ
额定功率：300-800 W
光源：25颗10W/30W RGB 3合一LED灯珠
光源寿命：100000小时
颜色范围：1670万种颜色
通道模式：8CH/80CH
防护等级：IP20
控制模式：DMX512模式，主从机模式
自走模式，声控模式
工作环境：室内使用

Parameter:

Input voltage: AC100-240V, 50/60Hz
Rated power: 300-800W
Light source: 25 10W/30W RGB 3-in-1 LED beads
Light source life: 100000 hours
Color range: 1 6.7 million colors
Channel mode: 8CH/80CH
Protection grade: IP20
Control horizontal mode: DMX512 mode, master and slave mode
Self-driving mode, voice control mode
Working environment: indoor use

12颗/1 4颗L ED3合1黄金点阵灯 CZ-L12/L14

12 /14 LED 3in1 gold dot matrix lamp

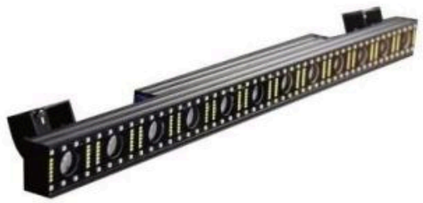

技术参数：

电源：100-240V 50-60Hz
总功率：150W
光源：112颗3色0.2W，180颗0.5W白光12颗3W暖白
通道：13CH /83CH/72CH/70CH/7CH/5CH
控制模式：DMX-512、声控、自走三种模式
特色：自走流水.灯带.光束.染色，三合一无闪烁技术，1200Hz的高频率.可以多台拼接，
效果更佳先进的比特残性调光技术，
达到很好的调光效果多种DMX通道模式，
使用寿命50000小时
光束角：6度，辐射范围：8度
调光/频闪：调光.1-20次/秒
防水等级：IP20

Parameter:

Power: 100-240-V 50to 60 hz
Total power: 1 50W
Light source: 112 3-color 0.2W, 180 0.5W white light 12 3W warmwhite
Channel: 13CH /83CH/72CH/70CH/7CH/5CH
Control mode: DMX-512, voice control, self - walking three modes
Features: self running water, light belt, light beam, dyeing, three in one
Scintillation-free technology, high frequency at 1200Hz
Can be more than one stitching, better effect
Advanced bit linear
dimming technology, to achieve a gooddimming effect
Multiple DMX channel modes
The service life is 50000 hours
Angle of beam: 6 degrees, radiation range: 8 degrees
Dimming/strobe: dimming,1-20 times/second
Waterproof rating: IP20

36颗黄金矩阵灯 CZ-L36D3

36 gold matrix lamps



技术参数：

输入电压：AC100-240V ，50/60Hz
额定功率：200W
光源：36颗欧式朗灯珠
效果：柔光效果或者光束效果任选
光束角度：5度
通道模式：5CH / 36CH
控制模式：DMX512模式、主从机模式、自走模式、声控模式
防水等级：IP20
尺寸：550x540x130mm

Parameter:

Input voltage: AC100-240V, 50/60Hz
Rated power: 200W
Light source: 36 European Lang lamp beads
Effect: Soft light or beam effect is optional
Beam Angle: 5 degrees
Channel mode: 5CH / 36CH
Control mode: DMX512 mode, master and slave mode, automatic mode, voice control mode
Waterproof rating: IP20
Size: 550x540x130mm

CZ-X18 LED18颗洗墙灯

LED18 wall washing lights

技术参数：

输入电压:AC100-240V 50-60Hz
LED：18颗12W四合一超高亮度灯珠
最大消耗额定功率:200W
LED使用寿命:<3万小时
PWM调光频率:1KHz
抗电强度:1.5KV
绝缘电阻:2MΩ
控制信号:DMX512
控制模式:单机控制模式/主从机模式
通道数:7通道
散热方式:自然冷却
4按钮LED 显示器设置地址码
防水等级：IP20
纸箱尺寸：102x11.5x15.5cm

Parameter:

Input voltage :AC100-240V 50-60Hz
LED: 18 12W quadrate and one ultra-high brightness lamp beads
Maximum consumption rated power :200W
LED service life :< 30,000 hours
PWM dimming frequency :1KHz
Resistance :1.5KV
Insulation resistance :2MΩ
Control signal :DMX512
Control mode: stand-alone control mode/master slave mode
Number of channels :7 channels
Heat dissipation method: natural cooling
4 button LED display to set address code
Waterproof rating: IP20
Carton size: 102x11.5x15.5cm





CZ-H18 防水洗墙灯

Waterproof wall-washing light

技术参数：

输入电压:AC100-240V 50-60Hz
LED：18颗10W四合一超高亮度灯珠
最大消耗额定功率:200W
LED使用寿命:<3万小时
PWM调光频率:1KHz
抗电强度:1.5KV
绝缘电阻:2MΩ
控制信号:DMX512
控制模式:单机控制模式/主从机模式
通道数:23/9/72CH
散热方式:自然冷却
4按钮LED 显示器设置地址码
防护等级：IP65
灯具特点：
最新的点控设计，每颗灯珠可以单独控制变换颜色，跑机跑马效果绚丽，是舞台背景和户外亮化工程首
纸箱尺寸：102x12x16cm

Parameter:

Input voltage :AC100-240V 50-60Hz
LED: 18 10W four-in-one ultra-high brightness lamp beads
Maximum consumption rated power :200W
LED service life :< 30,000 hours
PWM dimming frequency :1KHz
Resistance :1.5KV
Insulation resistance :2MΩ
Control signal :DMX512Control mode: stand-alone control mode/master slave mode
Channel number: 23/9/72 CH
Heat dissipation method: natural cooling
4 button LED display to set address code
Protection grade: IP65
Lamp features:
The latest point control design, each lamp bead can be individually controlled to change color,Online horse-racing effect gorgeous, is the first stage background and outdoor lighting project
Carton Size: 102x12x16cm





LED200W/300WCOB调焦影视聚光灯 CZ-511A

LED 200W/300W COB focusing video spotlights





技术参数：

额定电压： AC 100~240V, 50/60Hz
额定功率： 260W/360w
光源： LED200W / 300W COB集成灯珠
显色指数(CRI): Ra≥95
色温: 3200K / 4500K或5600K可选
光源寿命： ≥50,000 小时
出光角度: 范围9° ～ 60° 可调
调光:0到100% 线性调光
频闪：不低于20次/秒
焦距: 电动调节
光路:光学系统，玻璃反光杯
控制模式:DMX512模式，声控，自走，主从机模式
DMX通道： 2CH/3CH/4CH
防水等级: IP20

Parameter:

Rated voltage: AC 100 ~ 240V, 50 / 60Hz
Rated power: 260w/360w
Light source: led200w / 300W cob integrated lamp bead
Color index (CRI): RA ≥ 95
Color temperature: 3200K / 4500k or 5600k optional
Light source life: ≥ 50000 hours
Light output angle: range 9 ° ～ sixty °
AdjustableDimming: 0 to 100% linear dimming
Stroboscopic: no less than 20 times / S
Focal length: electric adjustment
Light path: optical system, glass reflective cup
Control mode: DMX512 mode, voice control, self-propelled, master-slave mode
Channel: 2CH / 3CH / 4CH
Waterproof grade: IP20

LED200W/300W影视聚光灯 CZ-511B

LED 200W/300W movie spotlight





技术参数：

额定电压：AC100V-240V，50Hz/60Hz
额定功率：260W／360W
光源：LED200W／300W进口集成灯珠
光通量：7000lm-8000lm
光源寿命：≥50,000 小时
色温：3200K或5600K可选
显色指数（CRI）：Ra≥90
调光：0-100%线性调光
出光角度：15°-55°可调
焦距：手动调焦
频闪：多种频闪功能，1-20次/秒
散热：高品质铜管导热系统加无噪音风扇
显示：LCD显示
控制模式：DMX512、自走、声控、主从机模式
通道：2CH
防护等级：IP20
使用环境温度：-20℃~45℃

Parameter:

Rated voltage: AC100V-240V, 50 Hz / 60 Hz
Rated power: 260W / 360W
Light source: led200w / 300W imported integrated lamp bead
Luminous flux: 7000lm-8000lm
Light source life: ≥ 50000 hours
Color temperature: 3200K or 5600k
CRI: RA ≥ 90
Dimming: 0-100% linear dimming
Light output angle: 15 ° - 55 °
AdjustableFocal length: manual focusing
Stroboscopic: various stroboscopic functions, 1-20 times / second
Heat dissipation: high quality copper tube heat conduction system with noiseless fan
Display: LCD display
Control mode: DMX512, self-propelled, voice control, master-slave mode
Channel: 2CH
Protection grade: Ip20
Ambient temperature: - 20 ℃ ~ 45 ℃

CZ-511C L ED300W影视聚光灯

LED300W movie spotlight

技术参数：

输入电压： AC100-240V, 50-60HZ
额定功率： 300W
光源： 进口300W灯珠
色温： 单色/双色(3200- 5600K) /R GBW
显指： > 90
散热： 静音风扇散热
频闪： 独立电子频闪
灯珠寿命： 50000h
调光： 0-255, 0%-1 00%线性调光.
光学材料： 玻璃螺纹聚光镜
光束角度： 12度-65度
防护等级： Ip20
控制模式： 国际标准DMX512信号，自走，主从
通道数量： 2个DMX通道
产品尺寸： 370*270*7 10MM (L*W*H)
重量： 11KG

Parameter:

Input voltage: AC100-240V, 50-60Hz
Rated power: 300W
Light source: imported 300W lamp beads
Color temperature: monochrome/two-color (3200- 5600K) /RGBW
Indicator:> 90
Heat dissipation: mute fan heat dissipation
Stroboscope: Independent ele ctronic stroboscope
Bead life: 50000h
Dimming :0-255, 0-100% linear dimming
Optical material: glass thread condenser
Beam Angle: 12 degrees -65 degrees
Protection grade: Ip20
Control mode: International standard DMX512 signal, self-propelled, master-slave
Number of channels: 2 DMX channels
Product size: 370*270*7 10MM (L*W*H)
Weight: 11 kg



CZ-59 L ED300W手动调焦成像灯

LED300W manual focusing imaging lamp

技术参数：

电源输入： POWER CON
电源插输入/输出： AC 100-240V 50-60HZ
信号输入/输出： 3P-XLP输入/出，DMX512信号
电源消耗功率： 最大300W
原进口西铁城300W，COB集成光源LED,
色温3200K (5600K)
显色性指数： CRI>90
控制： RDM, DMX512控制或主从机同步
通道： 4DMX通道，LCD显示屏，16Bit调光，4种调光曲线
光束角度： 手动17-50度
刷新频率： 2000HZ
散热处理： 铜管导热+静音风扇
外壳材料： 铝合金
防水等级： IP20
工作时温度： LED中心温度> 40度
尺寸： 65*34*26CM
重量： 12.8KG，
特点： 本产品是一款高显指，高光效，高光通量LED成像灯，全新光学设计，亮度高，光质纯净，边缘清晰，切光锋利，钢管散热，双滚珠静音风扇让LED寿命更长，光衰少，手动调焦17-50度，RDM信号双向输出，

Parameter:

Power input: Power Con plug
Input/output: AC100-240V50-60Hz
Signal input/output: 3P-XLP input/output, DMX5 12 signal
Power consumption: Max. 300W
Original imported 300W West Tiecheng, COB integrated light source. LED
Color temperature 3200K (5600K)
Color rendering index: CRI>90
Control: RDM, DMX512 control or master - slave synchronization
Channel: 4DMX channel, LCD display, 1 68it dimming, 4 kinds of modulation light curve
Beam Angle: Manval 1 7-50 degrees
Refresh frequency: 2000Hz
Heat dissipation treatment: copper tube heat conduction + silent fan
Shell material: aluminum alloy
Waterproof rating: IP20
Working temperature: LED center temperature > 40 degrees
Size: 65*34*26cm
Weight: 12.8KG
Features: This product is a high display, high luminous efficiency, highluminous flux LEDimaging lamp, new optical design, high brightness,pure light quality, clear edgeB: clear, sharp cut. , copper tube cooling,dual ball mute fan lets LEDsLonger life, less light decay, manual focusof 17-50 degrees, double RDM signalTo the output,



CZ-59A LED200W成像灯

LED200W imaging light

技术参数：

光源： 200WLED高亮度模组
色温： 3200K/5600K可选
光源预期使用寿命： 10000小时
电压： AC 100-240V ,50/ 60HZ
总功率： 250W
显色指数： 大于90
控制模式： DMX512，手动，主从
控制通道： 2CH，
0~~100%线性顺滑调光
散热方式： 风冷
可承受的最高环境温度： 40℃
可承受的最高表面温度： 65℃
可承受的最低工作温度： -5℃
净重： 9.3KG
毛重： 10.5KG，
度数： 19° /26° /36° /50°
灯尺寸： 340*270* 650MM
纸箱尺寸： 350* 350* 690MM
采用高密度集成新型光源的专业成像灯，比前一代成像灯的照度提升了1.5倍。可完全匹配专业的19°，26°，36°，50°的镜筒，光斑，LOGO成像都清晰。3200K，5600K显色指数大于90.专业为剧场，剧院，电视台，演播厅，宴会厅而设计的成像灯。

Parameter:

Light source: 200W LED high brightness module
Color temperature: 3200K/5600K optional
Expected service life of light source: 10000 hours
Voltage: AC100-240- v, 50/60 hz
Total power: 250W
Color rendering index: greater than 90
Control mode: DMX512, manual, master-slave
Control channel: 2CH
0~~ 100% linear smooth dimming
Heat dissipation method: air cooling
Maximum tolerable ambient temperature: 40℃
Maximum tolerable surface temperature: 65℃
Minimum acceptable operating temperature: -5℃
Net weight: 9.3 KG
Gross weight: 10.5 KG
Degree:19。/26。/36° /50°
Lamp size: 340*270*650MM
Carton size: 350*350* 690MM
The professional imaging lamp with high-density integratednew light source has 1.5 times higher iluminance than theprevious generation of imaging lamps. Can fully match theprofessional 19° ,26° , 36° , 50° lens cylinder, light spot, LOGOimaging are clear. 3200K, 5600K color rendering index greaterthan 90. Specialized for the theater, theater, television, studio,banquet hall and design of imaging lamps.



100W手动调焦成像灯 CZ-59B

100W manual focusing imaging lamp




技术参数：

输入电压：AC100-240V ,50-60HZ
光源：单颗100W COB LED模组
色温：3200K/5600K可选
平均寿命：50000小时
显色指数：>90
光通量：74001m
光斑角度：15°^30°
手动调焦功能效果：散光，聚光，柔光
总功率：120W
电源输入：输入输出手拉手
调光：0-100%线性调光
控制协议：标准DMX512协议RDM功能
通道模式：2CH标准DMX通道
冷却：内置型材散热
信号线输入：三芯/五芯
防护等级：IP20
产品尺寸：39*19*13.5CM
产品净重：3KG

Parameter:

Input voltage: AC100-240V, 50-60Hz
Light source: Single 100W COB LED module
Color temperature: 3200K/5600K
Optional average life: 50000hours
Color rendering index: >90
Luminous flux: 74001M
Spot Angle: 15°^30° manual focus
Function effect: astigmatism, focusing light, soft light
Electrical parameters
Total power: 120W
Power input: input and output hand in hand
Control systemDimming: 0- 100% linear dimming
Control protocol: standard DMX512 protocol RDM function
Channel mode: 2CH standard DMX channel
Cold: built-in profile heat dissipation
Signal line input: three cores/five cores
Protection grade: IP20
Product size: 39* 19* 13.5cm .
Net weight: 3KG

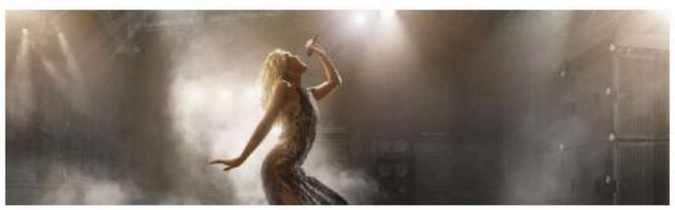

LED31颗/36颗车展灯 CZ-L31/L36

LED31/36 auto show lights




技术参数：

额定电压：AC100-250V 50/60Hz
额定功率：350W光源：31颗/36颗10W LED白光美国CREE科锐灯珠
色温：标准5600K或3200K
调光：0-100%线性调节
出光角度：20°
频闪：电子频闪，具有同步，异步，随机频闪方式，速度可调0.5-12次/秒
使用寿命：>50,000Hrs
温升：≤45℃
防水等级：IP20
包装规格：32X 32X 59cm
重量：6kg

Parameter:

Rated voltage: AC100-250V 50/60Hz
Rated power: 350W
Light source: 3110W LED white light Cree lamp beads
Color temperature: standard 5600K or 3200K
Dimming: 0-100% linear adjustment
Light Angle: 20
Stroboscopic: electronic stroboscopic, with synchronous, asynchronous and random stroboscopic modes, the speed can be adjusted 0.5-12 times/second
Service life: > 050,000Hrs
Temperature, 45 ℃or less
Protection grade: IP20
Physical specification: 29 X 29 X 52cm
Packing spe cification: 32 X 32x 59cm

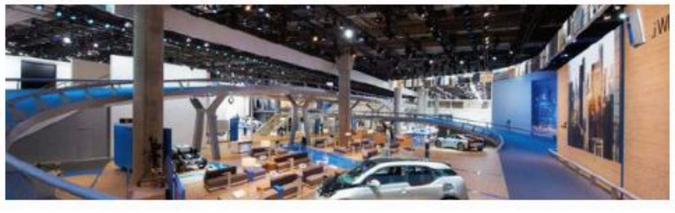

CZ-513 LED4眼观众面光灯

LED4 eye viewer face light lamp



技术参数：

光源：100W LED灯珠*4颗
色温：3200K总功率：400W
光源寿命：50000-100000小时
调光频率：1000Hz
驱动电流：700mA .
频闪：1-10次/每秒
透镜角度：60°
控制模式：DMX512，自走、主从
防水等级：IP20
操作非常简单，人性化设计，调光无闪烁、无抖动现象等。可适应摄影，照相、电视台等对灯光要求严格的场合。色温、亮度和频闪可以通过DMX 512信号调节。节能、耐用、噪音低、光色柔和、无抖动现象。满足拍照、摄影高端场所要求。非常适合会议室、演播室、婚礼庆典和舞台演出面光照明
纸箱尺寸：43x42x26cm

Parameter:

Light source: 100W LED beads *4
Color temperature: 3200k
Total power: 400W
Light source life: 50,000- 100000 hours
Dimming frequency: 1000Hz
Drive current: 700mA
Stroboscope: 1-10 times/second
Lens Angle: 60°
Control mode: DMX512, self- propelled, master-slave
Waterproof rating: IP20
The operation is very simple, humanized design, dimming withoutflicker, no jitter phenomenon. Can adapt to photography,photography, TV stations and other lighting requirements of theoccasion. Color temperature, brightness, and strobe can beadjusted using DMX 512 signals. Energy-saving, durable, low noise,soft light color, no jitter phenomenon. Meet the requirements ofphotography, photography high-end places. Ideal for meetingrooms, studios, wedding celebrations and stage performances
Carton Size: 43x42x26cm

CZ-513A 2眼观众面光灯

2-eye spectator face light lamp



技术参数：

额定电压：AC100V-240V 50/60HZ
总功率：200W LED
光源：每颗功率100W
数量：2颗
寿命：50000小时
颜色：暖白
色温校正：3200K/5600K
光斑角度：大60°
频闪：频闪1-25Hz
控制信号：国际标准DMX512信号
通道数量：2/4/6CH种模式可选
防护等级：IP20
工作环境：-20℃~40℃
纸箱尺寸：43x28x26cm

Parameter:

Rated voltage: AC100V-240V 50/60Hz
Total work rate: 200W
LED light source: power 100W each
Unit: 2 pieces,
Life: 50,000 hours
Color: warm white
Color temperature correction: 3200K/5600K
Spot Angle: 60°
Stroboscopic: Stroboscopic 1-25Hz
Control signal: international standard DMX512 signal
Number of channels: 2/4/6CH modes available
Protection class: die-cast aluminum, Ip20
Working environment: -20℃~ 40℃
Carton Size: 43x28x26cm

CZ-513B 2眼防水观众灯

2 eyes waterproof spectator lamp



技术参数：

额定电压：AC100V-240V 50/60HZ
总功率：200WLED
光源：每颗功率100W
数量：2颗
寿命：50000小时
颜色：暖白与正白
色温校正：线性色温校正3200K/5600K
光斑角度：大60
频闪：频闪1-25Hz
控制信号：国际标准DMX512信号
通道数量：2/4/6CH种模式可选
防护等级：压铸铝，IP20
工作环境：-20℃~40℃
防水等级：IP65
纸箱尺寸：43x28x26cm

Parameter:

Rated voltage: AC100V-240V 50/ 60Hz
Total power: 200W
LED light source: power 100W each
Unit: 2 piecesLife: 50,000hours
Colour: warm white and white
Color temperature correction: linear color temperature correction 3200K/5600K
Spot Angle: 60°
Stroboscopic: Stroboscopic 1 -25Hz
Control signal: international standard DMX512 signal
Number of channels: 2/4/ 6CH modes available
Protection class: die-cast aluminum, IP20
Working environment: -20℃ ~ 40℃
Waterproof rating: IP65
Carton Size: 43x28x26cm

CZ-513C LED防水四眼面光灯

LED waterproof four-eye surface light lamp



技术参数：

光源：LED 100W*4只
电压：AC100~240V，50/ 60HZ
电源功率：400W
控制模式：DMX512，主从，自走，声控模式，可单点控
色温：3200K
调光：线性调光0-100%
频闪：0-25次/秒
通道：2CH/4CH/6CH/8CH/12CH
重量：10.65kg
冷却：风冷+机箱散热
防护等级：IP65
最佳投射距离：15-30m
功能：照明、冷暖光可调、跑灯程序、爆闪、可调光。
合适使用范围：大型舞台、剧院、户外露天派对、酒吧、婚庆等娱乐场所。
纸箱尺寸：43x42x26cm

Parameter:

Light source: LED 100W*4
Voltage: AC100~240V, 50/60Hz
Power supply: 400W
Control mode: DMX512, master - slave, self - walking, voicecontrol mode, single point control
Color temperatu Jre: 3200k
Dimming: Linear dimming 0-100%
Stroboscope: 0-25 times/second
Channel: 2ch/4ch/6ch/8ch/12ch
Weight: 10.65kg
Cooling: air cooling + chassis heat dissipation
Protection class: Ip65
Best projection distance: 15-30m
Function: lighting, adjustable heating and cooling light, runninglight program, flash, adjustable light.
Suitable scope of use: large stage, theater, outdoor outdoor parties, bars, weddings and other entertainment venues
Carton Size: 43x42x26cm

LED108颗天排灯 CZ-T1083

LED108 sky row light



技术参数：

额定电压：AC100～240V 50/ 60Hz
额定功率：350W
工作环境温度：-20-50度
LED灯泡：108颗3W RGBW大功率LED
发光角度：60°
反光杯透镜恒流驱动：700mA
刷新频率：400Hz
颜色：1670万
使用寿命：50000～100000小时
数据输入/输出：3芯手拉手电源线一体工程塑料卡依插DMX512
通道数：4CH/8CH
应用场合：专业舞台/影像工作室/剧院
操作模式：至少包含DMX512、手动、主从、声控
冷却方式：温控风扇智能散热
防水等级：IP20

Parameter:

Rated voltage :AC100 ~240V 50/60Hz
Rated power :350W
Working environment temperature :-20- 50 degrees
LED bulbs :108 3WRGBW high-power LEDs
Light Angle :60°
reflective cup lensConstant current drive :700mA
Refresh frequency :400Hz
Color: 1 6.7 million
Service life :50000 ~ 100000 hours
Data input/output :3 core hand in hand power cord integrated engineering plastic card plugDMX512
Channel number: 4ch/8ch
Application: professional stage/video studio/theater
Operation mode: at least DMX512, manval, master-slave, voicecontrol
Cooling mode: temperature control fan intelligent heat dissipation
Waterproof rating: IP20



LED24颗四合一天排灯 CZ-T2410

LED24 quadrangle one day row lights




技术参数：

额定电压：AC100～240V 50/60Hz
额定功率：250W
工作环境温度：-20-50度
LED灯泡：24颗四合一灯珠
发光角度：25°，45°
可选恒流驱动：700mA
刷新频率：400Hz
颜色：1670万
使用寿命：50000～100000小时
数据输入/输出：3芯手拉手电源线一体工程塑料卡依插DMX512
通道数：8/4CH
应用场合：专业舞台/影像工作室/剧院
操作模式：含DMX512、手动、主从、声控
冷却方式：温控风扇智能散热
防水等级：IP20

Parameter:

Rated voltage :AC100 ~240V 50/60Hz
Rated power :250W
Working environment temperature: -20- 50 degrees
LED Light Bulb :24 four in one lamp bead
Light Angle :25°，45° optional
Constant current drive :700mA
Refresh frequency :400Hz
Color: 16.7 million
Service life :50000 ~ 100000 hours
Data input/output: 3 core hand in hand power cordintegrated engineering plastic card plugDMX512
Channel number: 8/4 ch
Application: professional stage/video studio/theater
Operation mode: including DMX512, manual, master-slave, voice control
Cooling mode: temperature control fan intelligent heat dissipation
Waterproof rating: IP20

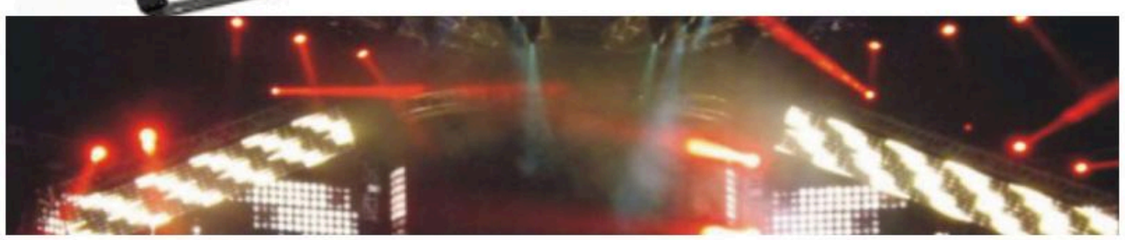

CZ-L600 LED三基色灯

LED tri-color light

技术参数：

额定电压：AC 100-240V 、50/60Hz
额定功率：300W
灯珠：600颗0.5w/5730贴片灯珠
颜色：暖白／冷白或双色温
色 温：3200K／5600K或双色温可选.
出光角度：120度
使用寿命：≥50.000小时
显色指数：Ra≥90
颜 色：黑色
外壳材质：铝合金
通道数量：2／4/6CH三种通道模式可切换
工作温度：-20℃至50℃
存放温度：-20℃至60℃
调光功能：0%至100%无极调节
冷却系统：自然风冷外置散热器
链接方式：电源线in，信号线in/out
操 作：液晶屏调地址码和调光强度
信 号 线：三芯卡依头输入，三芯卡依头输出
控制协议：DMX512调光和主机调光控制两种
防护等级：IP20
纸箱尺寸：64*41*17CM

Parameter:

Rated voltage: AC 100-240V, 50/60hz
Rated power: 300W
Lamp beads: 600 0.5w/5730 patch beads
Color: warm white / cold white or two color temperature
Color temperature: 3200K / 5600k or two color temperature optional
Light output angle: 120 degrees
Service life: ≥ 50000 hours
Color index: RA ≥ 90
Color: BlackShell material: aluminum alloy
Channel number: 3 channel modes of 2 / 4/6ch can be switched
Working temperature: 20 ℃ to 50 ℃
Storage temperature: 20 ℃ to 60 ℃
Dimming function: 0% to 100% non polar adjustment
Cooling system: natural air cooled external radiator
Link mode: power line in, signal line in/out
Operation: LCD address code and dimming intensity
Signal wire: three core XLR head input and three core XLR head output
Control protocol: DMX512 dimming and host dimming control
Protection grade: IP20
Carton size: 64 * 41 * 17cm



CZ-L400 LED三基色灯

LED tri-color light

技术参数：

额定电压：AC 100-240V 、50/60Hz
额定功率：200W
灯珠：400颗 * 0.5w/5730 LED贴片灯珠
出光角度：120度
使用寿命：大于50000小时
显色指数：Ra≥95
色温：3200K／5600K或双色温可选
DMX通道：4CH
调光：0-100%线性调光，摄像视频真实无闪烁
控制模式：DMX512,自走，声控,主从机模式
工作温度：-20℃至50℃
存放温度：-20℃至60℃
冷却系统：自然风冷外置散热器
链接方式：电源欧姆头in/out，卡依头in/out
包装尺寸：61*38*15.5CM

Parameter:

Rated voltage: AC 100-240V, 50/60Hz
Rated power: 200W
Lamp beads: 400pcs*0.5w/5730 LED SMD lamp beads
Light angle: 120 degrees
Service life: more than 50000 hours
Color rendering index: Ra≥95
Color temperature: 3200K/5600K or dual color temperature optional
DMX channel: 4CH
Dimming: 0-100% linear dimming, camera video is true and flicker-free
Control mode: DMX512, self-propelled, voice control, master-slave mode
Working temperature: -20℃ to 50℃
Storage temperature: -20℃ to 60℃
Cooling system: natural air cooling external radiator
Link mode: power ohm head in/out, XLR head in/out
Packing size: 61*38*15.5CM



CZ-L272/L256 LED三基色灯

LED tri-color light

技术参数：

工作电压：AC100-240V， 50／60HZ
额定功率：128W／150W
灯珠：256/272颗0.5w 5730贴片灯珠
颜色：暖白／冷白或双色温
色 温：3200K／5600K或双色温可选.
出光角度：120度
使用寿命：≥50.000小时
显色指数：Ra≥90
通道：4／6CH
调光：0-100%线性调光平滑无闪烁
控制模式:DMX512／手动／主从机
显示：LED数码显示
连接方式：手拉手电源和信号输入输出，方便快捷
保护功能：过流保护/过压保护/温度保护
防护等级：IP20
纸箱尺寸：61*38*15.5CM

Parameter:

Working voltage: AC100-240V, 50 / 60Hz
Rated power: 128W / 150W
Lamp beads: 256 / 272 0.5W 5730 patch lamp beads
Color: warm white / cold white or two color temperature
Color temperature: 3200K / 5600k or two color temperature optional
Light output angle: 120 degrees
Service life: ≥ 50000 hours
Color rendering index: RA ≥ 90
Channel: 4 / 6ch
Dimming: 0-100% linear dimming, smooth without flicker
Control mode: DMX512 / manual / master-slave
Display: LED digital display
Connection mode: hand in hand power supply and signal input and output, convenient and fast
Protection function: over current protection / over voltage protection / temperature protection
Protection grade: IP20
Carton size: 61 * 38 * 15.5cm



LED嵌入式影视平板灯 CZ-D256

LED embedded film flat panel light



技术参数：

额定功率：150W
灯珠数量颗：256颗5050贴片灯珠
出光角度：120度
使用寿命：50000小时
显色指数：Ra≥95 R9=88
色温：3200K（±150K）
额定电压：AC 100-240V 50/ 60Hz
通道数量：4个通道
工作温度：-20℃至50℃
存放温度：-20℃至60℃
调光功能：0%至100%无极调节
冷却系统：自然风冷外置散热器
链接方式：电源线in，信号线in/out
操作：液晶屏调地址码和调光温度
信号线：三芯卡依头输入，三芯卡依头输出
控制协议：DMX512调光和主机调光控制两种
嵌入式开口尺寸：长515MM，宽330MM，深105MM
工作环境：适合用在多媒体会议室，礼堂
防水等级：IP20
纸箱尺寸：59x13x41cm
重量：5kg

Parameter:

Rated power: 150W
Number of lamp beads: 256 5050 patch lamp beads
Extrusion Angle: 1 20 degrees
Service life: 50000 hours
Color rendering index: Ra≥95 R9=88
Color temperature: 3200k (±150k)
Rated voltage: AC 100-240V 50/ 60Hz
Number of channels: 4 channels
Operating temperature: -20℃ to 50℃
Storage temperature: -20℃ to 60℃
Dimming funiction: 0% to 100% non-polar adjustment
Cooling system: natural air cooled external radiator
Link mode: power line IN, signal line IN/OUT
Operation: LCD screen adjust address code and dimming intensity
Signal line: three core card non head input, three corecard non head output
Control protocol: DMX512 dimming and host dimming control two
Embedded opening size: Length 51 5MM, width 330MM, depth 105MM
Working environment: suitable for use in multimediacon ference room, auditorium
Waterproof rating: IP20
Carton Size: 59x13x41cm
Weight: 5kg



LED电动调角度影视平板灯 CZ-D900

LED electric Angle adjusting film flat panel lamp



技术参数：

输入电压：AC90-260V/50/ 60Hz
额定功率：200W光源:进口LED高亮度灯珠
灯珠数量：900颗
光源寿命：50000小时
光通量：(3200K标准光通量19.6lm / 5600K标准光通量21lm)
光效：(3200K标准光效1051m/W / 5600K标准光效110lm/W)
色温：3200K/5600K/双色(3200K+5600K)可选
显色指数：Ra≥90
调光：0~100%线性电子调光(16bit无闪烁调光)
光源类型：泛光型
控制方式：DMX512控台协议
控制模式：2CH/4CH通道
操作：数码管显示控制地址码和调光数值
仰俯角度：0~60°
限位方式：磁传感器,更高的灵敏度,高精准度限位
工作温度：-10° ~40°
冷却系统：高导热纯铝成型散热器自然散热
安装方式：吊装吸顶,嵌入式
防水等级：IP20
灯体尺寸：600 X 600x 128mm
开孔尺寸：500 X 500mm
包装尺寸：650x 650X 160mm (单台装)
净重：7.8kg
毛重：9.8kg

Parameter:

Input voltage: AC90- 260V/50/60Hz
Rated power: 200W
Light source: imported LED high brightness lamp beads
Number of lamp beads: 900
Light source life: 50000 hours
Luminous flux: (3200K standard luminous flux 19.6 IM /5600K standard luminous flux 21 IM)
Light efficiency: (3200K light efficiency 105lm/W / 5600Klight efficiency 110 lm/W)
Color temperature: 3200K/ 5600K/ dual color (3200K+5600K) is optional
Color rendering index: Ra≥90
Dimming: 0~ 100% linear electron dimming (16bitflicker-free dimming)
Light source type: floodlight type
Control mode: DMX512 console protocol
Control mode: 2CH/4CH channel
Operation: digital tube display control address code anddimming value
Elevation Angle: 0~60°
Limit mode: magnetic sensor, higher sensitivity, high precision limit
Operating temperature: -10° ~40°
Cooling system: high thermal conductivity pure aluminum molding radiator natural heat dissipation
Installation: hoisting, ceiling suction, embedded
Waterproof rating: Ip20
Lamp body size: 600 X 600x 128mm
Hole size: 500x500mm
Packing size: 650X 650x 160mm (single set)
Net weight: 7.8 kg
Gross weight: 9.8 kg

CZ-P1000 LEDRGB/RGBW频闪灯

LEDRGB/RGBW strobes

技术参数：

电压：AC100~240V 50/60HZ
功率：300W灯珠:960颗5050三色/四色LED灯珠
控制方式：DMX512、自走、主从、声控、带RDM功能
通道：CH03、CH09、CH24
调光：32bit 0~ 100%线性调光
特点：8段跑马+染色+爆闪
工作温度：-30℃~ 50℃
频闪频率：1~30HZ
外观：金属、黑色
连接方式：DMX512输入输出/电源输入输出。
IP等级：IP20
尺寸：52*32*20CM
重量：4KG

Parameter:

Voltage: AC100 50/60 hz~ 240v
Power: 300w
Light beads: 960 5050 3/4color LED lamp beads
Control mode: DMX512, self - walking, master - slave, voicecontrol, with RDM function.
Channels: CH03, CH09, CH24
Dimming: 32bit 0~ 100% linear dimming
Features: 8-stage horse racing+dye+flash
Operating temperature: -30 ℃~50℃
Stroboscopic frequency: 1~ 30Hz
Appearance: metal, black
Connection mode: DMX512 input/output/power input/output
IP rating: IP20
Size: 52*32*20cm
Weight: 4kg



CZ-P1296 1296颗分段频闪灯


1296 segmented strobe lights

技术参数：

电压：AC90-240V 50-60HZ
灯珠颗数：SMD5050红绿蓝三合一灯珠
控制模式：DMX512，主从，声控及自走模式
控制通道：3/5/11/18/20/26 DMX通道
额定功率：350w
LED分16段单独可控
灯珠寿命达50000小时
0-100%调光
LED彩虹效果，宏功能效果，内置自走程序
1-18次每秒电子频闪及脉冲频闪
效果可拼接，爆闪，效果，流水，图案效果
防水等级：IP20
产品尺寸：1000x80x70mm

Parameter:

Voltage: AC90-240-V 50-60 hz
Number of lamp beads: SMD5050 red, green and blue threelight beads
Control mode: DMX512, master - slave, voice control andself - driving mode
Control channel: 3/5/1 1/18/20/26 DMX channel
Rated power: 350W
The LED is separately controlled in 16 segments
The life of the lamp bead is 50000 hours
0-100% dimmer
LED rainbow effect, macro function effect, built-in self - walkprogram
1-18 electronic stroboscopic and pulse stroboscopic effectsper second
Can be spliced, flash, effect, water,
Waterproof rating: IP20
Pattern effect: 1000x80x70mm



CZ-HP1440 1440颗防水频闪灯

1440 waterproof strobe lights

技术参数：

输入电压：AC100-240V, 50/60HZ
额定功率：450W
光源：1440 pcs SMD RGB(Tri-color) LEDs
灯珠寿命：50,000小时
保险管：T6.3A
通道：3CH、5CH、48CH、50CH,11CH、56CH
防水等级：IP65
净重：12.8KGS
多重频闪效果
RGB单超混色系统，产生丰富色彩通道可选，
单块灯珠板可单控发光角度大，染色面积广
多种安装方式，可吊挂

Parameter:

Input voltage: AC100-240V, 50/60Hz
Rated power: 450W
Light source: 1440 PCS SMD RGB LEDs (Tri- color)
Bead life: 50,000 hours
Insurance tube: T6.3 A
Channel: 3ch, 5ch, 48ch, 50ch, 11ch, 56ch
Waterproof rating: Ip65
Net weight: 12.8 KGS
Multiple stroboscopic effects
RGB excellent color mixing system, produce rich colors
The channel is optional, and a single lamp bead board can besingle-controlled
Large luminous Angle, wide dyeing areaVarious installation modes, can be hung



CZ-P200 LED200W频闪灯

LED200W strongpoint of

技术参数：

电压：AC110V~240V 50-60Hz
功率：200W
光源：LED集成灯珠
灯珠数量：4颗灯珠
功率：50W/颗
发光颜色：正白
色温：6500~7200K
通道：8通道/6通道/2通道模式
控制方式：DMX主从/单机模式/声控模式
功能：频闪速度亮度可调，内置自走程序
包装：珍珠棉或航空箱
防护等级：IP20
尺寸：54*32*20.5CM
重量：7KG

Parameter:

Voltage: AC110V 50-60 hz~ 240v
Power: 200w
Light source: LED integrated lamp beads ;
Number of lamp beads: 4
Bead power: 50W/piece
Luminous color: Positive white
Color temperature: 6500 ~ 7200k
Channels: 8 channel /6 channel /2 channel mode
Control mode: DMX master slave/stand-alone mode/voicecontrol mode
Function: Stroboscopic speed and brightness can be adjusted, built-in self-running program
Packing: pearl cotton or airbox
Protection grade: IP20
Size: 54 * 32 * 20.5CM
Weight: 7kg



1600W雾峰林薄雾机 CZ-1600

1600W Haze Machine



JMY-1600是专业水性薄雾机,体积小,可以吊挂使用，特别设计的加热系统,能连续不断的提供均匀的烟雾，0-100精准输出，调节噪音控制优良，很合适在需要安静的空间使用。

JMY-1600is a professional longevity mistmachines, small physique, you can use multiplesuperimposed Specially designed heating systemthat provides continuous uniform smoke, 0-100accurate output regulation. Excellent noisecontrol is very appropriate in need quiet spaceuse. As with the use of high-end computer lamps,theater, stage, upscale bars and other places.With JMY-1 600 morning mist machine, theperfect fog coming soon. .

技术参数：

电压: AC 220-240V 50/60Hz/AC100-120V 50/60Hz
功率: 1600W
预热时间: 3-4 minutes
烟油容量: 2.2L
烟雾覆盖: 3500cu.ft/min
控制方式: DMX, remote control
DMX通道1: The smoke on and off
DMX通道2: Adjust the fan size .
重量: 13.5kg
尺寸: 43.5*36*33cm

Parameter:

Voltage: AC 220- 240V 50/60Hz/AC100-1 20V 50/ 60Hz
Power: 1600W
Warm-up time: 3-4 minutes
Smoke oil capacity: 2.2 L
Smoke covered: 3500cu.ft/min
Control: DMX, remote control
DMX channel 1: The smoke on and off
DMX channel 2: Adjust the fan size
N.W: 13 .5kg
Size: 43.5*36*33cm

水雾机 CZ-SW3000

Water Low Fog Machine



水雾机代替了传统的干冰机,只需加自来水和水雾油即可出烟,烟雾浓厚不上飘,成本低,婚庆宴会首选.
搭配2公升的油桶,在100%全输出的模式下,可以连续不断工作.

Water mist machine instead of the traditional dryice machine, just add tap water and water mistoil can smoke, thick smoke does not drift, low cost,wedding banquet first choice.
With 2 liter drum, it can work continvously in 100% full output mode.

技术参数：

电压: AC220V-240V 50/ 60HzAC110V-120V 50/ 60Hz
功率: 2000W/3000W
预热时间: 8分钟
输出烟量: 4000cust/min
控制器:液晶显示面板、遥控、DMX512
DMX通道: 2
重量: 40kg
包装尺寸: 78x40x46cm

Parameter:

V oltage: AC220V-240V 50/60HzAC110V-120V 50/ 60Hz
Power: 2000W/3000W
W. arm-up time: 8min
Output smoke: 4000cust/min
Controller: LCD panel、remotecontrol、DMX512
DMX channel: 2
Weight: 40kg
Packing size: 78x40x46cm



CZ-1500 1500W普通烟机

1500W Fog Machine

技术参数：

功率：1500W
电压：AC110V/220- 250V 50/60Hz
预热时间：8分钟
烟雾覆盖：2500cu.ft/min
烟油容量：2.5L
遥控控制：定时/定量/DMX-512
控制尺寸：570 X 3365 X 300mm
重量：9kg
喷烟距离：8米

Parameter:

Power: 1500W
Voltage: AC110V/220-250V 50/60Hz
Warm-up time: 8 minutes
Smoke covered: 2500cu.ft/min
Oil smoke capacity: 2.5L
Remote Control: Timing / Quantitative / DMX-512 control
Size: 570*3365*300mm
Weight: 9kg
Smoke distance: 8m



CZ-300 300W泡泡机

300W Bubble Machine

技术参数：

电压：AC 1 10/230V 50-60Hz±10%
功率：200W
泡泡油容量：2.5L
泡泡覆盖面积：200平方米
控制方式：遥控(30) 米，手动
产品尺寸：415x 250X 415mm
包装尺寸：620x 475X 540mm
净重：12kg
毛重：13kg

Parameter:

Voltage: AC 1 10/230V 50-60Hz±10%
Power: 200W
Bubble Oil Capacity: 2.5L
Bubble covered area: 200 m2
Control: Remote control (30) meters, manual
Product Dimensions: 415*250*415mm
Package Size: 620* 475* 540mm
Net weight: 12kg
Gross Weight: 13kg



CZ-600 双雾机

600W Double Fog Machine

技术参数：

额定电压：AC110V-240V/ 50-60HZ
额定功率：600W
限流保险：250V/5A
预热时间：无需加热恒温控制;
微电脑控制、数码显示;
1%-100%风速调节;
1%-100%薄雾输出调节;
消耗量：200min/l(30%)、120min/l(100%)
薄雾输出：3200Cu ft/min
油桶体积：3.2L
毛重：33.2kg

Parameter:

Rated voltage: AC110V-240V/ 50-60HZ
Rated power: 600W
Current limit insurance: 250V/5A
Warm-up time: no need for heating and constant temperature control;
Microcomputer control, digital display;
1%-100% wind speed adjustment;
1%-100% mist output adjustment;
Consumption: 200min/l(30%), 120min/l(100%)
Haze output: 3200Cu ft/min
Oil drum volume: 3.2L
Gross weight: 33.2kg



CZ-K48 48路机柜

48 road cabinets

技术参数：

供电：三相五线制AC380V±10%，频率50Hz±5%.
输入功率：400A 380V犀牛插
输出：48路40A胶木插最大48路X4KW
可选可用于任何负载,40W胶木插输出
设有250A总开关,过载与短路双重保护高分断空气开关.
三相独立电压，电流，监测。
三相A.B.C指示灯指示
外形尺寸：长:650MM宽:580MM高:750MM (14U)

Parameter:

Voltage: AC100 50/60hz ~ 240 V
Power: 300w
Light beads: 960 5050 three-color LED lamp beads
Control mode: DMX512, self - walking, master - slave, voicecontrol, with RDM function.
Channels: CH03, CH09, CH24
Dimming: 32bit 0~ 100% linear dimming
Features: 8-stage horse racing+dye+flash
Operating temperature: -30 ℃ ~50 ℃
Stroboscopic frequency: 1~ 30Hz
Appearance: metal, black
Connection mode: DMX512 input/output/power input/output
IP rating: Ip20
Size: 52*32* 20cm
Weight: 4kg



350W光束追光灯 CZ-Z350

350W beam pursuit lamp



技术参数：

电压: AC220V~ 240V 50Hz/ 60Hz
耗电功率: 450W
灯泡规格: 欧司朗OSRAM SIRIUS HRI 350W
颜色: 一个彩色转轮4种颜色+白光,色温片3种颜色
控制信号: 自配512信号
控制模式: 单机模式
光学系统: 高精密度石英透镜非球面组合(4道)
散热系统: 高强度风冷(双风机)
光圈效果: 光圈大小可调
频闪: 1-7次/秒频闪
色温校正: 正常5600k,调高6000K,调低3200K
光速距离: 40-70m
光速角度: 23度
安全措施: 符合各种安全标准,IP20保护等级,
电源线符合CE20/22三级标准高温自动切断保护装置
外壳: 铝合金包边
净重: 19kg
包装尺寸: 73*35*33cm

Parameter:

Voltage: AC220V 50hz~ 240v / 60 hz .
Power consumption :450W
Bulb size: OSRAM Sirius HRI 350W
Color: one color wheel with 4 colors + white light, 3 colors for colortemperature pad
Control signal: self - matching 512 signal
Control mode: stand-alone mode
Optical System: High Precision Quartz Lens Aspheric Assembly (4 lines)
Heat dissipation system: high intensity air cooling (double fans)
Aperture effect: Aperture size is adjustable
Strobbing :1-7 times/second
Color temperature correction: normal 5600K, up 6000K, down 3200K
Light speed distance :40-70m
The Angle of light speed :23 degrees
Safety measures: in line with various safety standards, IP20 protection level, power cord characterin line with CE20/22 level 3 standard, hightemperature automatic cut off protection device
Shell: Aluminum alloy with edge
Net weight: 19 kg
Packing size :73*35*33cm

440W光束追光灯 CZ-Z440

440W beam pursuit lamp



技术参数：

电压: AC220V~240V 50Hz/ 60Hz
耗电功率: 540W
灯泡规格: 欧司朗OSRAM SIRIUS HRI 440W
颜色: 一个彩色转轮5种颜色+白光,色温片3种颜色
控制信号: 自配512信号
控制模式: 单机模式
光学系统: 高精密度石英透镜非球面组合(4道)
散热系统: 高强度风冷(双风机)
光圈效果: 光圈大小可调
频闪:1-7次/秒频闪
色温校正: 正常5600k,调高6000K,调低3200K
光速距离: 60-100m
光速角度: 23度
安全措施: 符合各种安全标准,IP20保护等级,
电源线符合CE20/22三级标准,高温自动切断保护装置
外壳: 铝合金包边
净重: 21KG
包装尺寸: 73*35*33cm

Parameter:

Voltage: AC220V ~240v/60 hz
Power consumption: 540W
Bulb size: OSRAM Sirius HRI 440W
Color: a color wheel with 5 colors + white light, color temperature padwith 3 colors
Control signal: self - matching 512 signal
Control mode: stand-alone mode
Optical System: High Precision Quartz Lens Aspheric Assembly (4 lines)
Heat dissipation system: high intensity air cooling (double fans)
Aperture effect: Aperture size is adjustable
Strobbing: 1-7 times/second
Color temperature correction: normal 5600K, up 6000K, down 3200K
Light speed distance :60-100m
The Angle of light speed :23 degrees
Safety measures: in line with various safety standards,IP20 protectionlevel, power cord characterin line with CE20/22 level 3 standard, hightemperature automatic cut off protection device
Shell: Aluminum alloy with edge
Net weight: 21 kg
Packing size: 73*35*33cm

LED440W电子档追光灯 CZ-ZL440

LED440W electronic file tracking light



技术参数：

电压: AC220V~240V 50Hz/60Hz
耗电功率: 470W
灯泡规格: 440W LED
灯珠颜色: 一个彩色转轮5种颜色+白光,升温降温3种颜色
控制信号: 自配512信号
控制模式: 单机模式
光学系统: 高精密度石英透镜非球面组合(4道)
散热系统: 高强度风冷(双风机)
光圈效果: 光圈大小可调
频闪: 1-7次/秒频闪
色温校正: 正常5600k,调高6000K,调低3200K
光速距离: 40-50m
光速角度: 23度
安全措施: 符合各种安全标准，IP20保护等级,
电源线符合CE20/22三级标准,高温自动切断保护装置
外壳: 铝合金包边
净重: 19KG
包装尺寸: 73*33*31 cm

Parameter:

Voltage: AC220V 50hz ~ 240v/60hz
Power consumption: 470W
Bulb specification: 440W LED lamp bead
Color: one color wheel with 5 colors + white light, 3 colors for heatingand cooling
Control signal: self - matching 512 signa .
Control mode: stand-alone mode
Optical System: High Precision Quartz Lens Aspheric Assembly (4 lines)
Heat dissipation system: high intensity air cooling (double fans)
Aperture effect: Aperture size is adjustable
Strobbing: 1-7 times/second
Color temperature correction: normal 5600K, up 6000K, down 3200K
Light speed distance: 40-50m
The Angle of light speed: 23 degrees
Safety measures: in line with various safety standards,IP20 protectionlevel, power cord characterin line with CE20/22 level 3 standard, hightemperature automatic cut off protection device
Shell: Aluminum alloy with edge
Net weight: 19 kg
Packing size: 73*33*31 cm

CZ-K2010 2010珍珠控制台

2010 Peari Computre Controller

技术参数：

最新升级版本可用U盘及软驱输灯库
DMX512/1990标准，2048个DMX控制通道。
4个光电隔离独立驱动信号输出端口。
可抗2000Vrms电气冲击。独立电源独立信号。
可以控制40通道最多240台电脑灯和240路调光。
320×240大屏幕显示所有操作和变化及输出。
通道软分配。
可以存储450个程序。
旋钮有不同的时间可调。X/Y控制自然顺滑。
现场可以拷贝通道项目清单。
独立系统锁功能，有效防止误操作。
内置世界知名灯库使用更方便。
机内固化多种特效，有效支持现场变幻特效。
USB存储器，可以有效保存现场数据。
内置高性能绿色开关电源，90V-250V电压适应范围，符合全世界各国电源要求（定制）。
音频输入连接器：XLR-D3F×2。
专业工作灯，适合室内外演出使用。
使用专业航空箱包装，运输和演出更安全方便。
净重： 21.3kg
产品尺寸：L735xW595xH150mm

Parameter:

The latest upgrade version can be used with U disk and floppy drive to transfer the library
DMX512/1990 standard, 2048 DMX control channels.
4 optically isolated independent drive signal output ports.
It can resist 2000Vrms electrical shock. Independent power supply independent signal.
It can control up to 240 computer lights and 240 dimming channels with 40 channels.
The 320×240 large screen displays all operations, changes and outputs.
Channel soft distribution.
Can store 450 programs.
The knob can be adjusted at different times. X/Y control is natural and smooth.
The list of channel items can be copied on site.
The independent system lock function effectively prevents misoperation.
The built-in world-renowned light library is more convenient to use.
A variety of special effects are solidified in the machine to effectively support the changing special effects on site.
USB memory can effectively save field data.
Built-in high-performance green switching power supply, 90V-250V voltage adaptation range;
Meet the power requirements of countries all over the world (customized).
Audio input connector: XLR-D3F×2.
Professional work lights, suitable for indoor and outdoor performances.
Using professional air box packaging, transportation and performances are safer and more convenient.
Net weight: 21.3kg
Product size: L735xW595xH150mm



CZ-K1024 1024金刚控制台

1024 Diamond Console

技术参数：

DMX512/1 990标准，最大1024个DMX控制通道，
光电隔离信号输出最大控制96台电脑灯或96路调光，
使用珍珠灯库60个重演场景，
用于储存多步场景和单步场景，
多步场景最多可储存600步
关机数据保持U盘备份和升级
电源: AC90-240V 50/60Hz
开关电源尺寸: 485x 420x 105mm

Parameter:

DMX512 / 1990 standard, the maximum 1024 DMX controlchannel, photoelectric isolation signal outputThe maximum control of 96 sets of computer lights or 96dimming, the use of pearl lamp library60 repeat scenes for storing multi-step scenes and single -stepscenes.
Multi-step scenes can store up to 600 steps
Shutdown data retentionU disk backup and up grade
Power supply: AC90-240V 50 / 60Hz switching power supply
Size: 485 X 420 X 105mm



CZ-K512 阳光512控制台

Sunshine 512 Consol e

技术参数：

DMX512数码输出，512DMX控制通道
2个光隔离独立驱动信号输出端口
可控制32台16通道电脑灯
1600个走灯程序步储存容量。
48个走灯程序，每程序最多100步.
每步速度、渐变参数独立设置。
可选音乐同步或手动速率控制
可同时对32台电脑灯进行提灯操作。
关机数据保持
DMX信号输出连接器: XLR-3Fx2可选配12V鹅颈
工作灯电源: AC100-240V 50/ 60Hz
体积: 483x 400x 105mm

Parameter:

Dm￥512 digital output, 512DMX control channel
2 optical isolated drive signal output port
Can control 32 Of 16 channels
1600 chase steps storage capacity.
48 to goLights program, each up to 100 steps each step velocity gradient parameter set independently.
Optional music sync or manualspeed control 32 computers simultaneously lantern lamp operation.
Data Hold Off DMX signal output connector: XLR-3Fx2Optional
12V gooseneck lights
Power supply: AC100-240V 50/60Hz
Volume: 483* 400* 105mm



老虎触摸控台 Tiger Touch Pro

Tiger Touch console



技术参数：

采用功能强大的泰坦（Titan）9.1/10.1/11.3
三个版本操作系统
酷睿i5CPU ,120GB高速固态硬盘，4GB运行内存
内置1个15.6寸高亮电容触摸屏，支持联网到计算机
设备控制各种灯光3D可视化软件
内置UPS电源,防止突然断电系统损坏货丢失程序，
内置独立带隔离的HIFI级声卡，解决主板集成声卡
音质差 无隔离交流声干扰
支持中文菜单显示，内置7国以上语言
支持Art-Net网络功能,内置4个DMX物理输出口,2048个通道,可扩展至12个DMX物理输出口6144个通道
10个宏功能按钮，可让你更快的操作控台
20个重放推杆，支持1000个以上的程序重放
强大的属性控制窗口，CMY\RGB拾色板系统
快捷易用的图形发生器，分类的内置图形更易使用
支持CIPT协议，可以在控台上直接看到媒体服务器里媒体片段的图像缩略图
支持WI-FI接入，无线控灯，移动设备
（iPhone、iPad Touch）远程控制灯具
内置数千种灯库，内置灯库编辑软件，
可以随时在控台上编灯库；
内置Visualiser线条式灯光可视化软件
支持MIDI时间码声光同步功能，也可以在控台里播放音乐发送时间码来控制灯光程序重放。

Parameter:

Use powerful Titan 9.1/10.1/11.3
Three versions of operating system
Core i5CPU, 120GB high-speed solid state drive,
4GB running memory
Built-in 1 15.6-inch high-brightness capacitive touch screen, support networking to computer
Equipment control various lighting 3D visualization software
Built-in UPS power supply to prevent sudden power failure from damage to the system and loss of cargo procedures,
Built-in independent isolated HIFI-level sound card to solve the problem of motherboard integrated sound card
Poor sound quality, no isolation hum interference
Support Chinese menu display, built-in more than 7 languages
Support Art-Net network function, built-in 4 DMX physical output ports, 2048
Channels, expandable to 12 DMX physical output ports 6144 channels
10 macro function buttons, allowing you to operate the console faster
20 playback faders, support more than 1000 program playback
Powerful attribute control window, CMY\RGB color picker system
Fast and easy-to-use graphics generator, classified built-in graphics are easier to use
Support CIPT protocol, you can see the media server directly on the console
Image thumbnails of media clips in
Support Wi-Fi access, wireless control of lights, mobile devices (iPhone, iPad Touch) remote control lamps
Built-in thousands of light libraries, built-in light library editing software,
You can edit the light library on the console at any time;
Built-in Visualiser linear lighting visualization software
Support MIDI time code sound and light synchronization function, also can be in the console
Play music and send time code to control the light program replay.

8路信号放大器 CZ-KDB

8-channel signal amplifier



技术参数：

数字信号类型：DMX512/1990
1路输入，1路直通输出（非隔离）
8路光电隔离信号分配输出
各输入输出接口之间的电气隔离电压：>1000V
数字信号指示灯
信号放大功能，延长信号传输距离。
增强数据总线接入设备数量的能力，
提高数字式灯光控制系统的安全运行可靠性。
DMX信号输入连接器：XLR-D3M
DMX信号直通输出连接器：XLR-D3F
DMX信号分配输出连接器：XLR-D3F x 8
电源：AC200-240V, 50-60Hz
体积：483* 44.5 * 140(mm)
重量：4KG

Parameter:

Digital signal type: DMX512/1990
1 input, 1 direct output (non-isolated)
8-channel photoelectric isolation signal distribution output
Electrical isolation voltage between input and output interfaces: >1000V Digital signal indicator
The signal amplification function extends the signal transmission distance.
Enhance the ability of data bus access to the number of devices,
Improve the safe operation reliability of the digital lighting control system.
DMX signal input connector: XLR-D3M
DMX signal through output connector: XLR-D3F
DMX signal distribution output connector: XLR-D3F x 8
Power supply: AC200-240V, 50-60Hz
Volume: 483* 44.5 * 140(mm)
Weight: 4KG

12路直通箱 CZ-KDBC

12 Road Through Silicon Case .



技术参数：

供电：三相五线制AC380V±10%，频率50Hz±5%.
额定功率：12路×4KW; 可适用于任何负载.
过载与短路双重保护高分断空气开关.
A.B.C三相工作指示灯.
设两脚和三脚万能用插座方便使用，进口接线端输入，单40A胶木插输出，
外形尺寸(mm)：L515×W485×H133.
单机重量：12KG.

Parameter:

Power supply: three-phase five-wire system AC380V±10%. frequency 50Hz±5%.
Rated power: 12 channels × 4KW; applicable to any load.
High breaking air switch with double protection of overload and short circuit.
A.B.C three-phase working indicator light.
Equipped with two-pin and three-pin universal sockets for easy use, imported terminal input.
Single 40A bakelite plug output.
Dimensions (mm): L515×W485×H133.
Single machine weight: 12KG.

CZ-MA Ma黑马电脑灯控制台

Prince Touch Console





技术参数：

1个主控调光轮
4个属性编码轮(整合按键功能)
1个主控推杆(60mm手动),2个AB推杆(100mm手动)
21个程序回放推杆(60mm手动),42个程序存储功能键,
两个19寸宽屏触摸显示屏宽电压、节能
低功耗设计: AC165-264V
功率: 150W
120G固态硬盘, 4GB DDR3 1600内存
4个USB接口(A型)1个备援USB输入接口(B型),
1个音频输入接口,1个立体声输出接口
1个LTC输入接口，2个工作灯接口，
6个DMX-512输出接口
1个DMX-512输出接口(复合输出功能),
1个千兆网络接口，1个MIDI输入接口
尺寸: 750*300*970mm
重量: 57.2kg

Parameter:

4 attribute encoding whel(intergration of key function)
1 master fader (60mm manual),2 AB fader (100mm manval)
21 program playback fader (60mm manval)
42 program store function buttons,2 1 9-inch touch screen
Voltage:AC 165-264V
Power:1 50W
Built-in UPS power supply,no delay automatic switching, undervoltage, overvoltage prote ction .
120 GB solid state drives,4 GB of memory4 USB port(A type),
1 USB input port(B type)1 audio input interface,
1 stereo output interface1 LTC input interface,
2 working lamp interface6 DMX-512 output interface
1 DMX-512 output interface(composite output function)
1 gigabit network interface, 1 MIDI input interface
Size: 750*300* 970mm
Weight: 57 .2kg